

UNCLASSIFIED

AD 272 002

*Reproduced
by the*

**ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA**



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

AERON

62-23

272 002
CATALOGED BY ASTIA
AS AD NO. 272 002

**A STUDY OF THE WIND PROFILE
IN THE LOWEST 400 FEET OF THE ATMOSPHERE**

Progress Report No. 9

May 16, 1961 – September 15, 1961

IRVING A. SINGER AND CONSTANCE M. NAGLE

September 1961



**Prepared for
U.S. Army Signal Research and Development Laboratory
Fort Monmouth, New Jersey
Under Contract No. R-65-8-99812 SC-04-91
DA Project No. 3A99-07-001-03**



**BROOKHAVEN NATIONAL LABORATORY
Associated Universities, Inc.
under contract with the
United States Atomic Energy Commission**

**A STUDY OF THE WIND PROFILE
IN THE LOWEST 400 FEET OF THE ATMOSPHERE**

**Progress Report No. 9
May 16, 1961 - September 15, 1961**

IRVING A. SINGER AND CONSTANCE M. NAGLE

The object of this study is to obtain a reliable estimate of the wind profile between 37 and 355 ft above ground, based on a single wind measurement at 37 ft and associated simple measurements or observations.

Prepared for
**U.S. Army Signal Research and Development Laboratory
Fort Monmouth, New Jersey**

Under Contract No. R-65-8-99812 SC-04-91
Technical Requirements SCL-2101-K, dated 20 April 1959
SCL-5496, dated 5 November 1957

DA Project No. 3A99-07-001-03

**BROOKHAVEN NATIONAL LABORATORY
UPTON, NEW YORK**

LEGAL NOTICE

This report was prepared as an account of Government sponsored work. Neither the United States, nor the Commission, nor any person acting on behalf of the Commission:

- A. Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or
- B. Assumes any liabilities with respect to the use of, or for damages resulting from the use of any information, apparatus, method, or process disclosed in this report.

As used in the above, "person acting on behalf of the Commission" includes any employee or contractor of the Commission, or employee of such contractor, to the extent that such employee or contractor of the Commission, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with the Commission, or his employment with such contractor.

**PRINTED IN USA
PRICE \$1.25**

Available from the
Office of Technical Services
Department of Commerce
Washington 25, D.C.

January 1962

1050 copies

CONTENTS

I.	Purpose.....	1
II.	Abstract.....	1
III.	Reports and Conferences.....	2
IV.	Factual Data.....	2
	A. Data Collection.....	2
	B. Error Analysis.....	2
	1. Horizontal Displacement of Reference Level.....	2
	2. Prediction by Components.....	4
V.	Summary.....	4
VI.	Program for the Next Interval.....	4
VII.	Identification of Key Technical Personnel.....	4
VIII.	References.....	4
IX.	Appendix I.....	6
X.	Appendix II.....	32

LIST OF ILLUSTRATIONS

1.	Error curves for various time lags, Run No. 106, downwind case, T and $S = 30$ sec; mast displacement, 152 meters.....	3
2.	Error curves for various time lags, Run No. 108, upwind case, T and $S = 30$ sec; mast displacement, 152 meters.....	3

A STUDY OF THE WIND PROFILE IN THE LOWEST 400 FEET OF THE ATMOSPHERE

Progress Report No. 9
May 16, 1961 - September 15, 1961

I. PURPOSE

Since the wind exerts a force upon any structure or object exposed to it, and since it is difficult to measure this force with precision at heights appreciably above the ground, some means of estimating or predicting the wind at such heights is essential in the solution of many operational and theoretical problems. The purpose of this study is to describe the vertical wind profile and to relate it to other meteorological parameters that can readily be obtained. Since the wind profile is a function of space and time, the effect of these variables must also be assessed.

The primary objectives of the project in this period were (1) collection of additional wind speed data by utilizing a 50-ft portable mast in conjunction with the Ace meteorological tower, (2) analysis of mast data by using previously developed

models, and (3) prediction of wind speed from components at the reference level.

II. ABSTRACT

This report continues the analysis of errors in predicting upper level wind speeds from speeds at a lower reference level by utilizing an unweighted predictor of varying averaging length and relative displacement in time. Data were obtained by displacing a 50-ft mast 68, 152, and 225 meters from the Ace tower. These data were then analyzed to determine the location producing the least prediction error.

A study of the prediction of wind speed was made by using horizontal components at the reference level; however, no improvement occurred in the prediction errors.

Table 1

Summary of Mast Runs

Run No.	Wind condition	Mast location	Mast displacement from Ace tower			Mean 300-ft direction, degrees	Mean wind speed, m/sec			Standard deviation, m/sec	$T_{100}(^{\circ}F)$	$T_{100}(^{\circ}C)$
			Distance, m	Bearing, degrees	75 ft		50 ft	300 ft	75 ft			
102	B ₁	downwind	152	150	315	6.1	6.2	8.4	2.1	2.0	2.3	-2.2
104	B ₁	upwind	152	150	159	4.8	4.1	6.2	1.4	1.3	1.0	-1.9
106	B ₁	downwind	152	150	345	4.6	4.1	5.9	1.8	1.2	1.3	-2.3
107	B ₁	upwind	152	150	165	4.2	3.6	5.4	1.2	1.3	1.1	-2.1
108	B ₂	upwind	152	150	152	4.9	4.2	6.0	1.1	1.2	0.8	-1.9
112	B ₂	upwind	225	244	225	4.4	4.3	6.0	1.4	1.5	1.0	-1.7
113	B ₂ -B	upwind	225	244	225	3.7	3.9	5.5	1.3	1.4	1.1	-1.4
119	B ₁	upwind	68	210	210	4.0	3.2	5.9	1.3	3.1	1.0	-1.4
120	B ₁	upwind	68	210	210	3.4	2.0	4.5	1.0	0.9	0.5	-1.3
121	B ₁	upwind	68	210	210	3.9	3.1	5.4	1.2	1.3	0.7	-1.4
122	B ₁	upwind	68	210	210	3.5	2.7	5.5	1.0	1.1	0.6	-0.8
125	B ₁	upwind	68	210	210	5.1	4.2	7.8	1.6	1.6	1.3	-1.2
126	B ₁	downwind	68	210	015	3.5	3.0	4.5	1.1	1.0	1.0	-1.5

III. REPORTS AND CONFERENCES

On August 31, 1961, M. E. Smith and I. A. Singer met with Signal Corps personnel to discuss current results and plans for the final phase of the project.

IV. FACTUAL DATA

A. Data Collection

During the period covered by this report, 13 additional runs were completed with the 50-ft portable mast displaced horizontally from the Ace tower. Pertinent data on orientation of the mast are presented in Table 1 for each run.

B. Error Analysis

1. Horizontal Displacement of Reference Level. In a previous progress report¹ a study was made of the predictability of wind speed by using a time coordinate system based on the relationship

$$\text{Lag} = |S| - L - T, \quad (1)$$

where lag is defined as the difference in ending time, L refers to the difference in starting time between T and S , T refers to the prediction length, and S refers to the length of the predictor. These data were analyzed to determine the error in predicting the wind speed at 300 ft from a 75-ft reference level. The averaging lengths studied were 3, 12, 30, 60, and 180 sec. The reference level was lagged 0, 30, 60, 90, and 120 sec, and its averaging length was increased by factors of 1, 2, and 4.

From previous studies, the L that produces the minimum error for a vertical coordinate system (75 to 300 ft) is known to be negative; therefore the error should be reduced if the reference instrument is displaced upwind. According to Taylor's hypothesis,² the distance of displacement should follow the relationship $x=ut$, and the minimum error should then occur when $L=0$. To test this effect, a 50-ft portable mast was placed 68, 152, and 225 meters from the 410-ft meteorological tower during various wind conditions.

With an anemometer mounted on top of the mast, it was possible to test prediction of the wind speed in a horizontal as well as a vertical direction. Runs were analyzed only during unstable conditions by using 30-sec averages, since previous studies had revealed that there was little coupling between levels during stable conditions. Prediction

Table 2

Observed and Expected L
for Minimum Prediction Errors Between 75 and 50 Ft

Run No.	Gustiness	Mast location	Wind condition	
			Expected L , sec	Observed L , sec
102	B ₁	downwind	+24	+42
104	B ₁	upwind	-37	-48
106	B ₁	downwind	+37	+54
107	B ₁	upwind	-41	-39
108	B ₂	upwind	-36	-45
112	B ₂	upwind	-50	-33
113	B ₁ -B ₂	upwind	-57	-54
119	B ₁	upwind	-21	-24
120	B ₁	upwind	-25	-18
121	B ₁	upwind	-22	-30
122	B ₁	upwind	-25	-24
125	B ₁	upwind	-16	-18
126	B ₁	downwind	+22	+18

errors and spectral data for all runs analyzed during this period are presented in Appendix I.

Table 2 presents the expected (Taylor's hypothesis) and observed L for minimum prediction errors between 75 ft on the Ace tower and the top of the 50-ft mast during upwind and downwind cases. It is assumed that the effect of this height difference (75 vs 50 ft) is small. The results are reasonable, as all cases have the appropriate sign according to the mean wind direction, and most differences in L are not too large, considering the degree of accuracy of the instrumentation and computations.

Figure 1 presents the error curves for Run 106, a typical downwind case. The solid line shows the error of predicting wind speed measured on the top of the mast from a reference instrument located at 75 ft on the Ace tower as a function of L . The minimum error occurs with $L=+54$ sec, while the L expected from Taylor's hypothesis (x/u) is 37 sec. L is positive, since the instrument was placed 152 meters downwind. The broken line is the associated error curve when the wind speed at 300 ft is predicted from 75 ft on the Ace tower; it can be seen that the minimum error occurs with $L=-18$ sec. Therefore, if the reference instrument is displaced 152 meters downwind, the minimum error according to Taylor's hypothesis should occur at -55 sec [$(-18) - (37) = -55$]. The dotted line shows the error curve at 152

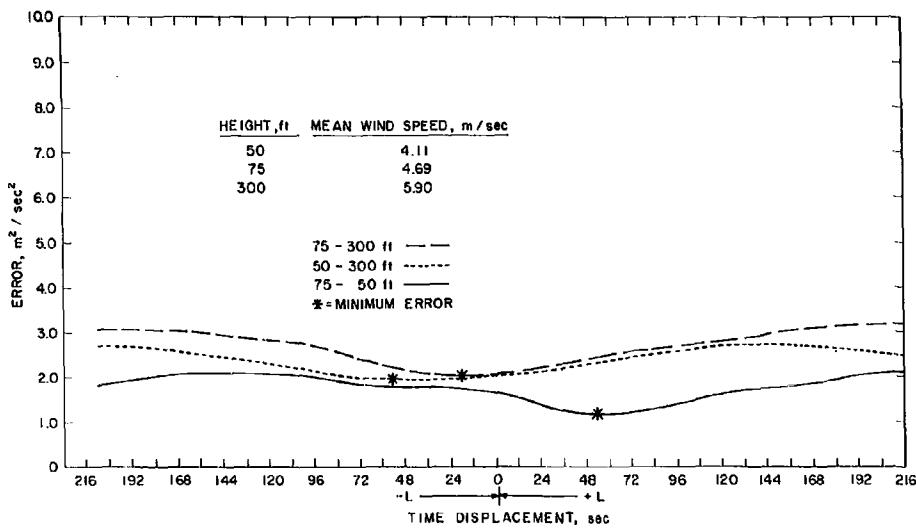


Figure 1. Error curves for various time lags, Run No. 106, downwind case.
 T and $S=30$ sec; mast displacement, 152 meters.

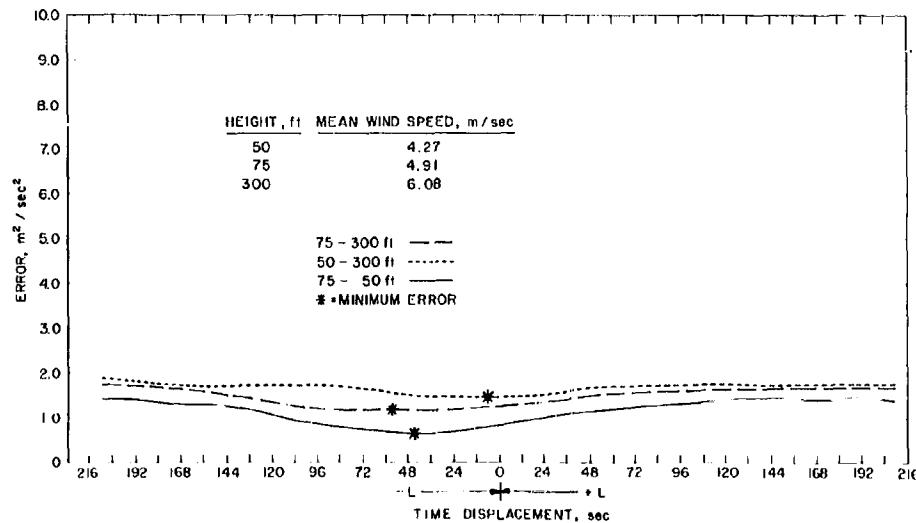


Figure 2. Error curves for various time lags, Run No. 108, upwind case.
 T and $S=30$ sec; mast displacement, 152 meters.

meters downwind; the actual minimum error occurs at -54 sec. The curves show that by use of Taylor's hypothesis the minimum errors move in the appropriate direction and are of reasonable magnitude, considering the degree of accuracy of the instrumentation.

Figure 2 presents the error curves for Run 108, a typical upwind case with the mast displaced 152 meters from the Ace Tower. A prediction of the wind speed at mast height from the 75-ft level on this tower revealed that the minimum error occurred when $L = -45$ sec, while the L expected

from Taylor's hypothesis is -36 sec. The broken line is the associated error curve when predicting the wind speed at 300 ft from 75 ft on the Ace Tower, and it can be seen that the minimum error occurs when $L = -58$ sec. Therefore, if the reference instrument is displaced 152 meters upwind, the minimum error according to Taylor's hypothesis would be expected to occur at $L = -12$ sec [$(-58) - (-36) = -12$]. The dotted line shows the error curve at 152 meters upwind; the actual minimum error occurs at -6 sec.

2. Prediction by Components. An analysis of the prediction of wind speed obtained by using the horizontal components of the wind speed at the reference level was made by means of the two-layer model formulated in Progress Report No. 5.³ These errors were compared with those obtained in that report, and the results show that the prediction was not improved for the cases tested. Spectral and error data used in the analyses (Runs 913 and 023) are listed in Appendix II.

V. SUMMARY

Analysis of the data collected with the mast displaced 68, 152, and 225 meters from the Ace Tower revealed that when 30-sec averages were used the minimum error between 75 and 50 ft occurred with a negative L for upwind cases and a positive L for downwind cases. Analysis also revealed that reasonable prediction errors are obtained for various lag times by means of Taylor's

hypothesis for winds either upstream or downstream.

The use of horizontal components of the wind speed at the reference level did not improve the prediction of upper level winds.

VI. PROGRAM FOR THE NEXT INTERVAL

A final report will be prepared comprising all the methods of investigation and the results of analysis of all the data presented in this and previous progress reports.

VII. IDENTIFICATION OF KEY TECHNICAL PERSONNEL

NAME	TITLE	HOURS
I.A. SINGER	Meteorologist	80
M.E. SMITH	Meteorologist	15
J.D. WALSH	Junior Meteorologist	688
C.M. NAGLE	Meteorology Associate	688

VIII. REFERENCES

1. I.A. SINGER AND C.M. NAGLE, *A Study of the Wind Profile in the Lowest 400 Feet of the Atmosphere*, Progress Report No. 7, BNL 635 (T-198), Sept. 1960.
2. G.I. TAYLOR, The spectrum of turbulence, *Proc. Roy. Soc. London* 161A, 476-90 (1938).
3. I.A. SINGER, *A Study of the Wind Profile in the Lowest 400 Feet of the Atmosphere*, Progress Report No. 5, BNL 596 (T-170), Jan. 1960.

Appendices

APPENDIX I

Wind Speed, B, Gustiness, Run No. 102									
			A=75	B=50	C=300	(ft)			
		Mean (m/sec)	6.16	6.23	8.45				
Spectra									
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBC	QBC
0	0.20333	0.15573	0.29816	0.12652	0.00960	0.21790	0.00720	0.15898	-0.00560
5	0.08749	0.07080	0.11666	0.05001	0.01311	0.08106	0.00887	0.05491	-0.01412
10	0.05771	0.05546	0.06651	0.03049	0.01905	0.03949	-0.00121	0.01872	-0.02210
15	0.04863	0.03873	0.05768	0.02015	0.02147	0.03621	-0.00081	0.00568	-0.02231
20	0.04098	0.02323	0.03901	0.01565	0.01482	0.02498	-0.00741	0.00362	-0.01376
25	0.02862	0.01429	0.02269	0.00769	0.00593	0.01124	-0.00651	-0.00097	-0.00307
30	0.03152	0.01837	0.01864	0.00549	0.00404	0.01142	-0.00946	0.00039	-0.00446
35	0.03964	0.01849	0.02000	0.00769	0.00532	0.01189	-0.01054	0.00396	-0.00537
40	0.03671	0.01090	0.01799	0.00481	0.00370	0.00405	-0.00539	0.00193	-0.00197
45	0.02674	0.01204	0.01382	0.00101	0.00054	0.00069	-0.00557	0.00091	0.00071
50	0.02359	0.00842	0.00997	-0.00402	0.00053	0.00102	-0.00584	0.00028	0.00207
55	0.01705	0.00719	0.00628	-0.00184	0.00038	0.00108	-0.00140	0.00014	0.00196
60	0.01270	0.00595	0.00585	-0.00060	0.00012	0.00114	-0.00250	0.00114	0.00028
80	0.00815	0.00570	0.00745	-0.00008	-0.00106	0.00049	-0.00248	0.00079	0.00143
100	0.00975	0.00492	0.00730	0.00108	0.00039	0.00091	-0.00190	0.00091	0.00037
120	0.00945	0.00458	0.00715	0.00258	0.00024	-0.00106	-0.00052	-0.00106	-0.00080
140	0.00760	0.00394	0.00575	0.00198	-0.00082	-0.00183	0.00037	-0.00183	-0.00032
160	0.00490	0.00326	0.00376	0.00028	-0.00110	-0.00076	0.00077	-0.00077	0.00058
180	0.00488	0.00314	0.00461	-0.00027	0.00031	-0.00028	-0.00021	-0.00028	0.00014
200	0.00460	0.00336	0.00540	0.00017	0.00106	-0.00021	0.00054	-0.00021	0.00182
250	0.00276	0.00365	0.00412	-0.00010	0.00019	0.00089	0.00032	0.00089	-0.00075
300	0.00174	0.00398	0.00474	0.00033	-0.00045	-0.00014	-0.00104	-0.00014	0.00172
350	0.00478	0.00356	0.00427	-0.00012	0.00026	-0.00002	-0.00080	-0.00025	0.00038
400	0.00170	0.00447	0.00332	-0.00057	-0.00018	0.00051	0.00004	0.00051	-0.00065
Coherence									
Freq.	75-50	75-300	50-300	(ft)	Freq.	75-50	75-300	50-300	(ft)
0	0.50844	0.78404	0.54501		60	0.00495	0.10162	0.03959	
5	0.43151	0.65148	0.38918		80	0.02432	0.10525	0.06285	
10	0.40384	0.40667	0.22741		100	0.02749	0.06235	0.02687	
15	0.46032	0.46768	0.23725		120	0.15513	0.02063	0.05386	
20	0.48800	0.42468	0.22340		140	0.15338	0.07977	0.15234	
25	0.23058	0.25981	0.03197		160	0.08066	0.06353	0.07581	
30	0.08024	0.37429	0.05854		180	0.01230	0.00545	0.00677	
35	0.11930	0.31845	0.12039		200	0.07457	0.01351	0.18499	
40	0.09203	0.06883	0.03879		250	0.00458	0.07866	0.09008	
45	0.00407	0.08524	0.00801		300	0.04497	0.13352	0.15786	
50	0.08277	0.14944	0.05198		350	0.00482	0.03138	0.01361	
55	0.02880	0.02920	0.08551		400	0.04702	0.04637	0.04600	

Prediction Errors, B, Gustiness, Run No. 102,
Mast Displacement = 152 m

	75-ft level	50-ft level	300-ft level
Mean wind speed, m/sec	6.16	6.23	8.45
Variance	4.80	4.37	5.29
<i>S</i> and <i>T</i> = 30 sec			
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	2.273	2.681	3.310
-12	2.351	2.612	3.246
-18	2.432	2.575	3.181
-24	2.516	2.573	3.131
-30	2.606	2.610	3.092
-36	2.700	2.689	3.052
-42	2.791	2.801	3.016
-48	2.880	2.931	2.986
-54	2.968	3.079	2.950
-60	3.055	3.247	2.912
90	3.138	4.163	2.902
-120	3.660	4.933	3.076
-150	3.714	5.405	3.328
150	2.886	4.984	4.544
120	2.659	4.766	4.571
90	2.305	4.479	4.525
60	2.014	4.067	4.272
54	1.982	3.969	4.184
48	1.959	3.860	4.097
42	1.953	3.739	4.007
36	1.963	3.609	3.904
30	1.982	3.471	3.801
24	2.010	3.321	3.703
18	2.046	3.168	3.606
12	2.090	3.027	3.512
6	2.143	2.897	3.432

Figures in boldface represent least error for a given time lag.

Wind Speed, B, Gustiness, Run No. 104

	A=75		B=50		C=300 (ft)				
	Mean (m/sec)		4.89		4.14		6.28		
Freq.	Spectra								
	A	B	C	CAB	QAB	CAC	QAC	CBC	QBC
0	0.40645	0.25202	0.52653	0.29470	-0.00880	0.41862	0.00320	0.33266	0.00640
5	0.11264	0.07261	0.13718	0.07643	-0.00996	0.10620	0.00065	0.08247	0.01281
10	0.03131	0.02906	0.03036	0.01942	-0.00730	0.02029	-0.00698	0.01218	-0.00122
15	0.02568	0.02632	0.02905	0.01564	-0.00741	0.01141	-0.00714	0.00522	-0.00545
20	0.01552	0.02183	0.02214	0.00791	-0.00719	0.00465	-0.00412	0.00177	-0.00270
25	0.01046	0.01747	0.01362	0.00316	-0.00540	0.00137	-0.00355	0.00261	-0.00060
30	0.01337	0.01529	0.00805	0.00034	-0.00231	0.00174	-0.00362	0.00078	-0.00174
35	0.01495	0.01365	0.00814	0.00003	0.00090	0.00404	-0.00205	--0.00010	-0.00271
40	0.01518	0.00906	0.00848	-0.00370	0.00035	0.00306	-0.00108	-0.00169	-0.00114
45	0.01505	0.00790	0.00612	-0.00524	-0.00247	0.00041	-0.00109	-0.00112	-0.00009
50	0.01296	0.00710	0.00530	-0.00160	-0.00236	-0.00098	-0.00171	-0.00010	-0.00044
55	0.01014	0.00635	0.00435	-0.00200	-0.00231	-0.00051	-0.00013	-0.00018	-0.00053
60	0.00585	0.00565	0.00409	-0.00239	-0.00226	0.00039	-0.00274	-0.00023	-0.00061
80	0.00306	0.00525	0.00218	-0.00181	0.00006	0.00027	-0.00001	-0.00037	-0.00006
100	0.00198	0.00408	0.00120	-0.00066	0.00082	0.00020	0.00002	-0.00037	0.00037
120	0.00180	0.00264	0.00096	0.00043	0.00043	--0.00007	0.00006	-0.00034	0.00026
140	0.00143	0.00167	0.00068	0.00052	0.00013	--0.00005	0.00004	-0.00021	0.00013
160	0.00077	0.00126	0.00087	0.00006	-0.00015	0.00008	0.00006	0.00031	0.00019
180	0.00062	0.00105	0.00074	-0.00017	-0.00017	0.00005	0.00008	0.00026	0.00015
200	0.00062	0.00076	0.00042	-0.00016	-0.00007	0.00005	0.00027	-0.00005	0.00010
250	0.00032	0.00055	0.00029	0.00009	-0.00003	-0.00012	0.00011	-0.00012	0.00002
300	0.00024	0.00031	0.00036	-0.00002	-0.00009	-0.00001	-0.00002	0.00001	0.00001
350	0.00029	0.00024	0.00020	0.00004	0.00006	0.	0.00006	0.00002	-0.00002
400	0.00015	0.00032	0.00014	-0.00003	0.00003	0.00002	0.00002	-0.00001	0.00005
Freq.	Coherence				Coherence				
	75-50	75-300	50-300	(ft)	Freq.	75-50	75-300	50-300	(ft)
0	0.84860	0.81891	0.83426		60	0.32735	0.32013	0.01839	
5	0.72636	0.72993	0.69929		80	0.20415	0.01094	0.01228	
10	0.47306	0.48434	0.16984		100	0.13716	0.01700	0.05592	
15	0.44314	0.24285	0.07448		120	0.07782	0.00492	0.07229	
20	0.33726	0.11233	0.02157		140	0.12030	0.00422	0.05372	
25	0.21422	0.10163	0.03014		160	0.02690	0.01493	0.12060	
30	0.02667	0.14989	0.02954		180	0.08879	0.01940	0.11596	
35	0.00397	0.16865	0.06619		200	0.06473	0.28955	0.03916	
40	0.10043	0.08180	0.05409		250	0.05114	0.28556	0.09279	
45	0.28225	0.01472	0.02611		300	0.11425	0.00579	0.00179	
50	0.08835	0.05655	0.00541		350	0.07471	0.06207	0.01667	
55	0.14500	0.00628	0.01134		400	0.03750	0.03810	0.09152	

Prediction Errors, B₁ Gustiness, Run No. 104,
Mast Displacement = 152 m

	75-ft level	50-ft level	300-ft level
Mean wind speed, m/sec	4.89	4.14	6.28
Variance	2.13	1.77	1.08
<i>S</i> and <i>T</i> = 30 sec			
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	1.101	1.685	2.345
-12	1.060	1.649	2.325
-18	1.019	1.622	2.306
-24	0.980	1.606	2.289
-30	0.945	1.601	2.277
-36	0.916	1.608	2.272
-42	0.896	1.627	2.274
-48	0.886	1.655	2.283
-54	0.888	1.692	2.301
-60	0.902	1.735	2.324
-90	1.081	2.003	2.511
-120	1.285	2.237	2.750
-150	1.457	2.430	2.995
150	1.855	2.736	2.893
120	1.669	2.587	2.757
90	1.448	2.406	2.637
60	1.305	2.237	2.552
54	1.290	2.198	2.535
48	1.278	2.155	2.518
42	1.268	2.109	2.503
36	1.258	2.060	2.488
30	1.248	2.007	2.472
24	1.235	1.951	2.453
18	1.219	1.892	2.433
12	1.198	1.833	2.410
6	1.171	1.778	2.388

Figures in boldface represent least error for a given time lag.

Wind Speed, B, Gustiness, Run No. 106									
			A=75	B=50	C=300	(ft)			
	Mean (m/sec)		4.69	4.11	5.90		Spectra		
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBC	QBC
0	0.09370	0.04169	0.09099	0.03375	-0.00160	0.06473	-0.00180	0.04172	-0.00080
5	0.04626	0.02072	0.04465	0.01462	-0.00229	0.03037	-0.00396	0.01677	-0.00171
10	0.04236	0.02190	0.03274	0.01195	0.00274	0.02210	-0.00366	0.00823	-0.00262
15	0.04147	0.02147	0.02071	0.01019	0.01274	0.01274	-0.00253	0.00345	-0.00577
20	0.03554	0.02586	0.02073	0.01043	0.01832	0.00833	0.00278	0.00903	-0.00557
25	0.02331	0.02378	0.01674	0.00635	0.01417	0.00810	0.00152	0.00884	-0.00628
30	0.01322	0.01130	0.01666	-0.00041	0.00419	0.00571	-0.00298	0.00040	-0.00273
35	0.01458	0.00838	0.01133	-0.00247	0.00074	0.00330	-0.00396	-0.00079	0.00127
40	0.01917	0.00845	0.00851	-0.00193	-0.00067	0.00059	-0.00197	0.00024	0.00187
45	0.02305	0.01110	0.00673	-0.00276	0.00027	-0.00151	-0.00063	-0.00053	-0.00067
50	0.02140	0.01154	0.00716	-0.00522	0.00188	0.00194	-0.00174	-0.00044	-0.00101
55	0.02036	0.00930	0.00693	-0.00524	0.00221	0.00457	-0.00204	0.00125	0.00012
60	0.01983	0.00800	0.00472	-0.00448	0.00248	-0.00049	-0.00235	-0.00062	0.00124
80	0.00600	0.00690	0.00259	-0.00111	0.00226	-0.00126	-0.00055	0.00049	0.00150
100	0.00319	0.00468	0.00203	0.00001	0.00034	-0.00023	0.00017	0.00051	0.00063
120	0.00305	0.00312	0.00146	0.00007	-0.00037	-0.00002	0.00051	-0.00014	-0.00024
140	0.00343	0.00259	0.00149	0.00012	-0.00033	-0.00041	0.00027	-0.00038	-0.00014
160	0.00218	0.00202	0.00151	-0.00004	0.00004	-0.00047	0.00028	0.00001	-0.00013
180	0.00125	0.00143	0.00095	-0.00004	0.00003	-0.00014	-0.00007	0.00029	0.00006
200	0.00128	0.00105	0.00085	-0.00004	0.00001	0.	-0.00004	0.00001	0.00006
250	0.00128	0.00068	0.00064	-0.00008	-0.00016	0.00028	0.00002	-0.00017	0.00012
300	0.00115	0.00029	0.00044	-0.00009	0.00010	0.00002	0.00003	0.00003	0.00007
350	0.00062	0.00044	0.00036	-0.00007	-0.00002	0.00002	-0.00011	-0.00004	-0.00006
400	0.00076	0.00050	0.00033	-0.00005	-0.00016	0.	0.00003	0.00008	-0.00002
Coherence									
Freq.	75-50	75-300	50-300	(ft)	Freq.	75-50	75-300	50-300	(ft)
0	0.29225	0.49183	0.45901		60	0.16528	0.06157	0.05090	
5	0.22847	0.45413	0.30715		80	0.15313	0.12163	0.13934	
10	0.16203	0.36183	0.10404		100	0.00775	0.01263	0.06915	
15	0.29892	0.19644	0.10164		120	0.01490	0.05850	0.01695	
20	0.48354	0.10467	0.20998		140	0.01388	0.04716	0.04250	
25	0.43497	0.17406	0.29538		160	0.00073	0.09092	0.00557	
30	0.11865	0.18836	0.04044		180	0.00140	0.02063	0.06456	
35	0.05442	0.16085	0.02356		200	0.00126	0.00147	0.00415	
40	0.02577	0.02592	0.04943		250	0.03676	0.09619	0.09949	
45	0.03006	0.01726	0.00977		300	0.05427	0.00257	0.04545	
50	0.12465	0.04432	0.01469		350	0.01943	0.05600	0.03283	
55	0.17081	0.17732	0.02447		400	0.07395	0.00359	0.04121	

Prediction Errors, B, Gustiness, Run No. 106,
Mast Displacement = 152 m

	75-ft level	50-ft level	300-ft level
Mean wind speed, m/sec	4.69	4.11	5.90
Variance	3.24	1.64	1.85
<i>S</i> and <i>T</i> = 30 sec			
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	1.684	2.045	1.979
-12	1.728	2.024	1.968
-18	1.762	2.013	1.959
-24	1.785	2.015	1.950
-30	1.800	2.032	1.941
-36	1.808	2.064	1.931
-42	1.812	2.108	1.923
-48	1.815	2.164	1.918
-54	1.821	2.229	1.916
-60	1.831	2.300	1.920
-90	1.987	2.617	2.017
-120	2.164	2.832	2.276
-150	2.142	2.941	2.463
150	1.834	3.036	2.748
120	1.611	2.847	2.702
90	1.349	2.677	2.582
60	1.190	2.493	2.388
54	1.188	2.455	2.338
48	1.200	2.415	2.286
42	1.226	2.374	2.234
36	1.264	2.329	2.184
30	1.313	2.283	2.139
24	1.372	2.236	2.098
18	1.436	2.192	2.063
12	1.503	2.149	2.034
6	1.569	2.110	2.010

Figures in boldface represent least error for a given time lag.

Wind Speed, B, Gustiness, Run No. 107									
			A=75		B=50		C=300		(ft)
	Mean (m/sec)		4.28		3.68		5.42		
Spectra									
Freq.	A	B	C	GAB	QAB	GAC	QAC	GBC	QBC
0	0.05711	0.04606	0.03835	0.02906	-0.00280	0.01435	-0.00400	0.01349	0.00064
5	0.02836	0.02735	0.02253	0.01426	-0.00186	0.01257	-0.00426	0.00730	0.00054
10	0.02556	0.02762	0.02394	0.00573	-0.00782	0.01547	-0.00530	0.00524	0.00436
15	0.02231	0.02716	0.01701	0.00566	-0.00821	0.01192	-0.00594	0.00444	0.00127
20	0.01834	0.02301	0.01504	0.00675	-0.00616	0.01015	-0.00140	0.00154	0.00226
25	0.01593	0.02008	0.01366	0.00651	-0.00598	0.00824	-0.00152	0.00143	0.00413
30	0.01244	0.01495	0.00911	0.00416	-0.00310	0.00419	-0.00194	0.00124	0.00256
35	0.00966	0.00849	0.00737	-0.00009	-0.00161	0.00073	-0.00205	-0.00147	0.00101
40	0.00874	0.00720	0.00632	-0.00023	0.00010	-0.00015	-0.00177	-0.00126	-0.00031
45	0.00657	0.00764	0.00712	0.00025	0.00114	-0.00155	-0.00102	-0.00076	-0.00075
50	0.00610	0.00782	0.00599	0.00039	0.00120	0.00066	0.00002	-0.00009	-0.00044
55	0.00783	0.00804	0.00478	-0.00008	0.00060	0.00020	-0.00002	0.00011	0.00124
60	0.00590	0.00725	0.00357	-0.00056	-0.00235	0.00079	-0.00083	0.00093	0.00150
80	0.00425	0.00570	0.00189	-0.00044	-0.00089	-0.00022	-0.00021	0.00026	0.00131
100	0.00265	0.00441	0.00168	0.00024	-0.00059	-0.00046	-0.00002	-0.00006	0.00075
120	0.00279	0.00281	0.00143	0.00113	-0.00022	-0.00065	0.00005	0.	-0.00004
140	0.00276	0.00223	0.00144	0.00091	0.00009	-0.00036	0.	0.00044	0.00007
160	0.00175	0.00198	0.00110	0.00036	0.00040	0.00015	0.00024	0.00035	0.00026
180	0.00117	0.00158	0.00063	0.00011	0.00019	0.00021	-0.00010	0.00018	-0.00003
200	0.00088	0.00129	0.00065	-0.00004	0.00016	0.00003	0.00020	0.00002	-0.00018
250	0.00093	0.00074	0.00045	0.00004	-0.00006	-0.00010	-0.00001	0.00018	-0.00005
300	0.00044	0.00074	0.00032	0.00005	0.00004	-0.00005	-0.00002	0.00014	-0.00004
350	0.00037	0.00032	0.00014	0.00001	-0.00006	-0.00005	-0.00001	0.00002	-0.00010
400	0.00062	0.00045	0.00030	0.00006	-0.00010	-0.00007	-0.00006	-0.00001	-0.00005
Coherence					Coherence				
Freq.	75-50	75-300	50-300	(ft)	Freq.	75-50	75-300	50-300	(ft)
0	0.32402	0.10133	0.10325		60	0.13644	0.06234	0.12035	
5	0.26663	0.27569	0.08696		80	0.04069	0.01152	0.16557	
10	0.13313	0.43701	0.07027		100	0.03472	0.04762	0.07641	
15	0.16411	0.46739	0.04616		120	0.16905	0.10652	0.00040	
20	0.19788	0.38060	0.02161		140	0.14488	0.03261	0.06181	
25	0.24428	0.32264	0.06964		160	0.08358	0.04161	0.08728	
30	0.14472	0.18812	0.05941		180	0.02607	0.07340	0.03345	
35	0.03170	0.06651	0.05084		200	0.02396	0.07150	0.03912	
40	0.00100	0.05712	0.03700		250	0.00756	0.02413	0.10480	
45	0.02714	0.07360	0.02096		300	0.01259	0.02060	0.08953	
50	0.03338	0.01193	0.00431		350	0.03125	0.05019	0.23214	
55	0.00582	0.00108	0.04032		400	0.04875	0.04570	0.01926	

Prediction Errors, B, Gustiness, Run No. 107,
Mast Displacement = 152 m

	75-ft level	50-ft level	300-ft level
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	1.105	1.226	2.307
-12	1.060	1.206	2.341
-18	1.059	1.194	2.373
-24	1.042	1.189	2.399
-30	1.030	1.191	2.419
-36	1.024	1.203	2.433
-42	1.024	1.223	2.443
-48	1.030	1.251	2.450
-54	1.040	1.285	2.456
-60	1.053	1.322	2.461
-90	1.130	1.517	2.469
-120	1.233	1.771	2.553
-150	1.342	1.956	2.591
150	1.616	2.197	2.441
120	1.631	2.054	2.290
90	1.547	1.878	2.216
60	1.415	1.675	2.187
54	1.387	1.631	2.179
48	1.361	1.584	2.171
42	1.337	1.538	2.167
36	1.312	1.492	2.166
30	1.286	1.448	2.170
24	1.257	1.404	2.179
18	1.226	1.360	2.195
12	1.194	1.319	2.217
6	1.162	1.283	2.243

Figures in boldface represent least error for a given time lag.

Wind Speed, B₂ Gustiness, Run No. 108

Wind Speed, B ₂ Gustiness, Run No. 108									
A=75 B=50 C=300 (ft)									
Mean (m/sec) 4.91 4.27 6.08									
Spectra									
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBC	QBC
0	0.10256	0.05587	0.07148	0.06659	-0.00320	0.07355	-0.00040	0.05276	0.00080
5	0.04284	0.02735	0.02575	0.02776	-0.00430	0.02554	-0.00083	0.01909	0.00165
10	0.03070	0.02374	0.01555	0.01844	-0.00829	0.01256	-0.00526	0.00933	-0.00052
15	0.01987	0.01852	0.00878	0.01101	-0.00549	0.00453	-0.00339	0.00170	-0.00108
20	0.01688	0.01707	0.00671	0.00809	-0.00570	0.00208	-0.00370	-0.00089	-0.00139
25	0.01987	0.01674	0.00607	0.00642	-0.00870	0.00225	-0.00506	0.00105	-0.00135
30	0.01485	0.01258	0.00507	0.00330	-0.00736	0.00045	-0.00337	0.00203	-0.00044
35	0.00966	0.00982	0.00615	0.00044	-0.00426	0.00069	-0.00176	0.00346	0.00116
40	0.00845	0.00667	0.00600	-0.00088	-0.00083	0.00020	-0.00003	0.00252	0.00037
45	0.00735	0.00673	0.00537	-0.00050	0.00015	0.00002	0.00018	0.00124	-0.00121
50	0.00760	0.01286	0.00617	-0.00255	-0.00154	0.00010	0.00134	0.00138	-0.00176
55	0.00762	0.01207	0.00591	0.00279	-0.00160	0.00037	0.00051	0.00065	-0.00014
60	0.00697	0.00790	0.00554	0.00018	-0.00098	0.00070	0.00033	0.00016	0.
80	0.00389	0.00590	0.00207	-0.00057	-0.00023	0.00037	0.00015	0.00015	0.00060
100	0.00374	0.00345	0.00122	-0.00066	0.00012	-0.00023	0.00016	-0.00017	0.00019
120	0.00087	0.00271	0.00083	-0.00046	0.00019	-0.00005	-0.00010	-0.00011	0.00006
140	0.00137	0.00247	0.00102	-0.00024	0.00001	0.00018	-0.00042	0.00006	0.00002
160	0.00097	0.00167	0.00129	-0.00004	-0.00006	-0.00033	-0.00021	0.00010	0.00001
180	0.00091	0.00125	0.00099	-0.00008	-0.00002	-0.00010	-0.00021	0.00020	0.00016
200	0.00075	0.00126	0.00075	-0.00020	0.00008	0.00001	-0.00018	0.00001	0.00029
250	0.00063	0.00073	0.00052	-0.00013	-0.00019	-0.00008	-0.00014	-0.00001	0.00002
300	0.00038	0.00055	0.00032	0.00007	0.00010	-0.00014	-0.00003	-0.00003	-0.00004
350	0.00052	0.00054	0.00042	0.00001	-0.00011	-0.00003	-0.00005	-0.00007	-0.00004
400	0.00043	0.00052	0.00024	-0.00001	-0.00009	0.00007	-0.00004	-0.00003	0.00007
Coherence									
Freq.	75-50	75-300	50-300	(ft)	Freq.	75-50	75-300	50-300	(ft)
0	0.77565	0.73793	0.69718		60	0.01803	0.01551	0.00058	
5	0.67349	0.59193	0.52133		80	0.01646	0.01980	0.03132	
10	0.56085	0.38841	0.23654		100	0.03488	0.01720	0.01544	
15	0.41131	0.18350	0.02495		120	0.03185	0.00525	0.00698	
20	0.33990	0.15906	0.02378		140	0.01705	0.14942	0.00159	
25	0.35147	0.25426	0.02879		160	0.00321	0.04036	0.01263	
30	0.34826	0.15353	0.06765		180	0.00598	0.06005	0.05301	
35	0.19335	0.06015	0.22051		200	0.04910	0.05778	0.08910	
40	0.02596	0.00081	0.16210		250	0.11524	0.07937	0.00132	
45	0.00551	0.00083	0.08306		300	0.07129	0.16859	0.01420	
50	0.09080	0.03851	0.06304		350	0.04345	0.01557	0.02866	
55	0.11247	0.00882	0.00620		400	0.03667	0.06298	0.04647	

Prediction Errors, B₂ Gustiness, Run No. 108,
Mast Displacement = 152 m

	75-ft level	50-ft level	300-ft level
Mean wind speed, m/sec	4.91	4.27	6.08
Variance	1.32	1.56	0.71
<i>S</i> and <i>T</i> = 30 sec			
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	0.807	1.240	1.478
-12	0.767	1.224	1.480
-18	0.731	1.213	1.487
-24	0.700	1.205	1.497
-30	0.676	1.198	1.511
-36	0.659	1.192	1.530
-42	0.650	1.187	1.552
-48	0.650	1.184	1.575
51	0.659	1.183	1.599
-60	0.676	1.185	1.624
-90	0.853	1.234	1.731
-120	1.086	1.372	1.758
-150	1.283	1.552	1.731
150	1.462	1.689	1.788
120	1.417	1.691	1.785
90	1.319	1.662	1.782
60	1.196	1.565	1.720
54	1.168	1.537	1.694
48	1.140	1.505	1.665
42	1.110	1.470	1.634
36	1.078	1.435	1.605
30	1.044	1.400	1.577
24	1.008	1.367	1.550
18	0.970	1.337	1.525
12	0.931	1.309	1.503
6	0.890	1.284	1.488

Figures in boldface represent least error for a given time lag.

Wind Speed, B₂ Gustiness, Run No. 112

Wind Speed, B ₂ Gustiness, Run No. 112									
A=75 B=50 C=300 (ft)									
Mean (m/sec) 4.44 4.37 6.03									
Spectra									
Freq.	A	B	C	CAB	QAB	CAC	QAC	GBC	QBC
0	0.16928	0.13090	0.20493	0.09960	0.00240	0.16564	0.00160	0.12909	0.00040
5	0.06959	0.05230	0.06336	0.03540	0.00702	0.05732	0.00501	0.03741	0.00073
10	0.04461	0.03499	0.03458	0.01514	0.00169	0.03131	-0.00001	0.01087	0.00074
15	0.02737	0.02737	0.03431	0.00655	-0.00429	0.02025	-0.00373	0.00737	0.00480
20	0.02106	0.02740	0.01981	0.00401	-0.00184	0.01157	-0.00320	0.00550	0.00311
25	0.01332	0.02793	0.00967	0.00319	0.00128	0.00436	-0.00060	0.00549	0.00144
30	0.00938	0.02406	0.00891	0.00303	0.00011	0.00088	-0.00068	0.00593	0.00303
35	0.01006	0.02062	0.00742	-0.00013	-0.00075	0.00128	-0.00148	0.00490	0.00224
40	0.01107	0.01970	0.00769	-0.00024	-0.00097	0.00326	-0.00070	0.00341	0.00107
45	0.00754	0.02072	0.00806	-0.00145	-0.00260	0.00158	-0.00025	0.00150	0.00255
50	0.00727	0.02049	0.00603	-0.00290	-0.00504	0.	-0.00154	0.00193	0.00183
55	0.00620	0.01219	0.00511	-0.00179	-0.00411	-0.00083	-0.00086	0.00178	-0.00091
60	0.00550	0.00885	0.00400	-0.00097	-0.00149	-0.00082	-0.00065	0.00284	0.00155
80	0.00379	0.00560	0.00248	-0.00030	-0.00078	-0.00037	-0.00104	0.00215	0.00057
100	0.00310	0.00515	0.00196	0.00102	-0.00038	0.00010	-0.00111	0.00056	0.00034
120	0.00293	0.00428	0.00141	0.00123	0.00050	-0.00010	-0.00058	-0.00075	0.00002
140	0.00238	0.00302	0.00087	0.00050	0.00050	-0.00003	-0.00019	0.00013	0.00012
160	0.00241	0.00239	0.00073	-0.00010	0.00041	-0.00001	0.00013	0.00014	0.00020
180	0.00170	0.00255	0.00097	-0.00006	0.00013	-0.00017	0.00024	0.00009	-0.00004
200	0.00146	0.00209	0.00085	0.00010	-0.00003	-0.00025	0.00017	-0.00011	-0.00014
250	0.00116	0.00110	0.00059	-0.00002	0.00001	0.00023	0.00003	0.00004	-0.00021
300	0.00058	0.00081	0.00051	-0.00053	-0.00022	0.00003	-0.00004	-0.00004	-0.00010
350	0.00068	0.00066	0.00034	-0.00008	0.00007	0.00003	-0.00004	0.00008	0.00008
400	0.00077	0.00070	0.00044	-0.00004	-0.00006	-0.00021	0.	-0.00004	-0.00013
Coherence									
Freq.	75-50	75-300	50-300	(R)	Freq.	75-50	75-300	50-300	(ft)
0	0.44795	0.79097	0.62122	0.62122	60	0.06494	0.04977	0.29571	
5	0.35786	0.75085	0.42250	0.42250	80	0.03291	0.12964	0.35624	
10	0.14868	0.63549	0.09811	0.09811	100	0.07421	0.20443	0.4252	
15	0.08184	0.45149	0.00238	0.00238	120	0.14058	0.08385	0.09328	
20	0.03373	0.34541	0.07355	0.07355	140	0.05180	0.01648	0.01781	
25	0.03176	0.15038	0.11927	0.11927	160	0.11545	0.02288	0.05124	
30	0.04073	0.01480	0.20686	0.20686	180	0.00473	0.05246	0.00392	
35	0.00279	0.05129	0.18972	0.18972	200	0.00357	0.07365	0.01784	
40	0.00458	0.13060	0.08567	0.08567	250	0.00039	0.07861	0.07042	
45	0.05673	0.04211	0.05241	0.05241	300	0.70094	0.00845	0.02808	
50	0.22698	0.05410	0.05725	0.05725	350	0.02518	0.01081	0.05704	
55	0.26590	0.04509	0.06416	0.06416	400	0.00965	0.13017	0.06006	

Prediction Errors, B₀ Gustiness, Run No. 112,
Mast Displacement = 225 m

	75-ft level	50-ft level	300-ft level
Mean wind speed, m/sec	4.44	4.37	6.03
Variance	2.02	2.28	1.17
<i>S</i> and <i>T</i> = 30 sec			
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	1.897	1.337	2.425
-12	1.872	1.323	2.487
-18	1.852	1.319	2.560
-24	1.836	1.325	2.640
-30	1.825	1.344	2.721
-36	1.825	1.376	2.799
-42	1.835	1.417	2.871
-48	1.853	1.467	2.935
-54	1.876	1.525	2.989
-60	1.906	1.583	3.034
-90	2.116	1.944	3.141
-120	2.267	2.268	3.197
-150	2.303	2.529	3.242
150	2.313	2.537	3.162
120	2.168	2.327	3.061
90	2.020	2.048	2.909
60	1.982	1.749	2.690
54	1.990	1.697	2.634
48	1.998	1.649	2.575
42	2.004	1.606	2.516
36	2.007	1.567	2.460
30	2.006	1.527	2.411
24	1.998	1.487	2.373
18	1.983	1.450	2.349
12	1.965	1.415	2.342
6	1.945	1.384	2.352

Figures in boldface represent least error for a given time lag.

Wind Speed, B_1 - B_2 Gustiness, Run No. 113

	A=75		B=50		C=300 (ft)				
	Mean (m/sec)		3.75		3.97		5.50		
	Spectra								
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBC	QBC
0	0.09583	0.07474	0.20794	0.03111	-0.00560	0.10178	-0.01040	0.06524	0.00240
5	0.04204	0.03842	0.06939	0.01197	-0.00776	0.03721	-0.01474	0.02031	0.00384
10	0.03765	0.04911	0.04277	0.01494	-0.01774	0.02619	-0.01365	0.01635	0.00418
15	0.02796	0.04400	0.03115	0.01446	-0.01745	0.01709	-0.00933	0.01042	0.00495
20	0.01863	0.02498	0.01760	0.00530	-0.00822	0.00860	-0.00451	0.00136	0.00313
25	0.02207	0.01671	0.01138	-0.00177	-0.00635	0.00746	-0.00455	-0.00150	0.00219
30	0.02356	0.01473	0.00793	-0.00174	-0.00561	0.00399	-0.00298	-0.00090	-0.00623
35	0.01612	0.01075	0.00646	-0.00048	-0.00259	0.00095	-0.00147	-0.00009	-0.00164
40	0.01113	0.00915	0.00711	-0.00147	-0.00143	0.00182	-0.00229	-0.00066	-0.00132
45	0.01195	0.00978	0.00881	-0.00014	-0.00518	0.00362	-0.00293	0.00179	0.00103
50	0.00961	0.01150	0.00668	0.00048	-0.00413	0.00202	-0.00025	0.00124	0.00071
55	0.00855	0.01290	0.00499	0.00111	-0.00198	0.00015	0.00029	0.00146	-0.00478
60	0.00675	0.01198	0.00373	-0.00076	-0.00132	0.00047	-0.00165	0.00099	-0.00113
80	0.00448	0.00520	0.00396	-0.00109	-0.00016	0.00026	-0.00096	0.00052	-0.00049
100	0.00413	0.00383	0.00228	0.00046	0.00023	0.00001	-0.00054	0.	-0.00009
120	0.00342	0.00344	0.00098	0.00059	0.00029	-0.00010	0.00018	-0.00011	0.00040
140	0.00279	0.00253	0.00095	-0.00017	-0.00044	0.00008	0.00035	-0.00008	0.00044
160	0.00237	0.00190	0.00090	0.00009	0.00036	0.00019	0.00015	0.00001	0.00011
180	0.00169	0.00169	0.00062	0.00003	-0.00044	-0.00015	0.00012	-0.00003	0.00008
200	0.00126	0.00159	0.00050	-0.00003	-0.00016	0.00011	0.00016	0.00001	-0.00001
250	0.00108	0.00094	0.00050	0.00004	-0.00033	0.00002	0.00004	-0.00002	-0.00013
300	0.00074	0.00068	0.00036	-0.00010	-0.00007	0.00016	0.00006	0.	-0.00011
350	0.00066	0.00073	0.00025	0.00020	0.00002	0.00008	-0.00008	0.00002	-0.00004
400	0.00044	0.00107	0.00014	0.00015	-0.00009	0.00008	0.00001	0.00007	-0.00005

Freq.	Coherence			(ft)	Freq.	Coherence			(ft)
	75-50	75-300	50-300			75-50	75-300	50-300	
0	0.13951	0.52529	0.27424		60	0.02869	0.11691	0.05051	
5	0.12599	0.54911	0.16026		80	0.05210	0.05576	0.02479	
10	0.29092	0.54167	0.13559		100	0.01672	0.03098	0.00093	
15	0.41747	0.43529	0.09710		120	0.03674	0.01265	0.05105	
20	0.20555	0.28760	0.02649		140	0.03152	0.04863	0.08321	
25	0.11783	0.30401	0.03705		160	0.03058	0.02747	0.09836	
30	0.09941	0.13274	0.33921		180	0.06139	0.03149	0.00697	
35	0.04004	0.02942	0.03885		200	0.01323	0.05984	0.00025	
40	0.04130	0.10813	0.03348		250	0.10885	0.00370	0.03681	
45	0.22976	0.22015	0.04950		300	0.02961	0.10961	0.04943	
50	0.15642	0.06454	0.02658		350	0.08385	0.07758	0.01096	
55	0.04672	0.00250	0.38806		400	0.06500	0.10552	0.04940	

Prediction Errors, B_1 - B_2 Gustiness, Run No. 113,
Mast Displacement = 225 m

	75-ft level	50-ft level	300-ft level
Mean wind speed, m/sec	3.75	3.97	5.50
Variance	1.69	2.16	1.30
<i>S</i> and <i>T</i> = 30 sec			
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	2.024	1.893	2.815
-12	1.953	1.845	2.813
-18	1.888	1.811	2.818
-24	1.829	1.793	2.829
-30	1.778	1.794	2.848
-36	1.736	1.810	2.875
-42	1.704	1.840	2.907
-48	1.684	1.880	2.943
-54	1.675	1.929	2.991
-60	1.679	1.931	2.999
-90	1.794	2.268	3.169
-120	1.936	2.517	3.272
-150	2.078	2.739	3.397
150	2.765	3.497	3.020
120	2.669	3.340	2.888
90	2.622	3.118	2.858
60	2.569	2.800	2.912
54	2.549	2.724	2.920
48	2.524	2.644	2.924
42	2.491	2.561	2.924
36	2.452	2.474	2.918
30	2.407	2.382	2.906
24	2.357	2.289	2.890
18	2.300	2.197	2.871
12	2.238	2.109	2.852
6	2.170	2.026	2.836

Figures in boldface represent least error for a given time lag.

Wind Speed, B, Gustiness, Run No. 119											
	A=75			B=50			C=300 (ft)				
	Mean (m/sec)			4.05			3.25			5.96	
Spectra											
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBC	QBC		
0	0.06580	0.06543	0.09875	0.05551	0.00160	0.06827	-0.00360	0.05535	-0.00760		
5	0.03379	0.03520	0.03620	0.02876	0.00282	0.02548	-0.00698	0.02373	-0.01191		
10	0.02906	0.02988	0.01633	0.02312	-0.00080	0.01046	0.00056	0.01240	-0.00168		
15	0.01873	0.01876	0.00806	0.01276	-0.00274	0.00314	0.00267	0.00493	0.00242		
20	0.01600	0.01602	0.00697	0.00964	-0.00449	0.00451	0.00029	0.00397	0.00130		
25	0.01600	0.02006	0.00688	0.00898	-0.00605	0.00397	-0.00102	0.00302	-0.00032		
30	0.01450	0.02260	0.00561	0.00751	-0.00778	0.00114	-0.00197	0.00166	-0.00148		
35	0.01189	0.02086	0.00415	0.00686	-0.00684	-0.00012	-0.00165	0.00029	-0.00217		
40	0.00828	0.01859	0.00335	0.00653	-0.00152	-0.00092	-0.00063	-0.00053	-0.00152		
45	0.00748	0.01347	0.00257	0.00327	-0.00079	-0.00102	-0.00031	0.00016	-0.00105		
50	0.00840	0.01121	0.00149	0.00080	-0.00424	-0.00077	-0.00005	0.00094	-0.00066		
55	0.00838	0.01290	0.00134	-0.00043	-0.00423	-0.00011	-0.00035	-0.00025	-0.00063		
60	0.00811	0.01498	0.00126	-0.00226	-0.00033	0.00032	-0.00071	0.00038	-0.00008		
80	0.00560	0.01245	0.00130	0.00160	0.00009	0.00047	-0.00082	-0.00085	0.00005		
100	0.00277	0.01370	0.00094	-0.00017	-0.00003	0.00011	-0.00008	-0.00033	0.00044		
120	0.00164	0.01650	0.00052	0.00046	0.00016	-0.00013	0.00016	0.00017	-0.00021		
140	0.00126	0.01700	0.00060	0.00017	0.00011	0.00030	0.00012	0.00002	0.00049		
160	0.00113	0.01610	0.00033	0.00060	0.00019	0.00011	0.00023	0.00105	0.00117		
180	0.00213	0.01685	0.00071	0.00183	-0.00014	0.00015	0.00024	0.00122	0.00049		
200	0.00184	0.01710	0.00043	0.00160	-0.00073	-0.00010	0.00010	0.00010	0.00001		
250	0.00072	0.01685	0.00028	-0.00008	-0.00068	0.00005	0.00009	-0.00013	0.00021		
300	0.00063	0.01493	0.00014	-0.00041	-0.00003	0.00001	-0.00003	0.00021	0.00030		
350	0.00082	0.01700	0.00013	0.00146	0.00152	-0.00011	0.00002	-0.00021	0.00020		
400	0.00045	0.01550	0.00012	-0.00034	-0.00003	0.00001	0.00010	-0.00012	-0.00028		
Coherence					Coherence						
Freq.	75-50	75-300	50-300	(ft)	Freq.	75-50	75-300	50-300	(ft)		
0	0.71631	0.71929	0.48310		60	0.04294	0.05935	0.06799			
5	0.70211	0.57060	0.55324		80	0.03683	0.12271	0.04479			
10	0.61634	0.23122	0.32090		100	0.00079	0.00711	0.02349			
15	0.48474	0.11253	0.19947		120	0.00877	0.04984	0.00851			
20	0.44121	0.18314	0.15629		140	0.01469	0.10482	0.09613			
25	0.36529	0.15263	0.06683		160	0.01155	0.03083	0.09017			
30	0.35682	0.06369	0.03901		180	0.09385	0.05297	0.14448			
35	0.37837	0.05517	0.05537		200	0.09830	0.02528	0.00137			
40	0.29203	0.04482	0.04161		250	0.03864	0.05258	0.01293			
45	0.11232	0.05912	0.03259		300	0.01797	0.01134	0.06416			
50	0.19771	0.04757	0.07898		350	0.31865	0.11726	0.03805			
55	0.16723	0.01199	0.02658		400	0.01670	0.18704	0.04989			

Prediction Errors, B₁ Gustiness, Run No. 119,
Mast Displacement = 68 m

	75-ft level	50-ft level	300-ft level
Mean wind speed, m/sec	4.05	3.25	5.96
Variance	1.77	1.08	1.17
<i>S</i> and <i>T</i> = 30 sec			
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	0.857	1.538	3.233
-12	0.837	1.527	3.222
-18	0.827	1.519	3.211
-24	0.823	1.517	3.201
-30	0.825	1.519	3.196
-36	0.836	1.529	3.194
-42	0.863	1.543	3.202
-48	0.904	1.561	3.224
-54	0.954	1.581	3.255
-60	1.007	1.603	3.290
-90	1.320	1.735	3.500
-120	1.567	1.898	3.665
-150	1.630	2.040	3.763
-150	1.551	2.003	3.859
-120	1.585	1.894	3.710
90	1.525	1.766	3.602
60	1.386	1.693	3.493
54	1.348	1.683	3.460
48	1.301	1.675	3.426
42	1.249	1.666	3.400
36	1.196	1.656	3.378
30	1.145	1.643	3.360
24	1.096	1.626	3.344
18	1.043	1.607	3.324
12	0.988	1.587	3.297
6	0.935	1.568	3.270

Figures in boldface represent least error for a given time lag.

Wind Speed, B₁ Gustiness, Run No. 120

	A=75		B=50		C=300 (ft)				
	Mean (m/sec)		3.42		2.70		4.52		
	Spectra								
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBG	QBG
0	0.06758	0.04104	0.06498	0.03907	0.00320	0.04666	-0.00160	0.01700	-0.00480
5	0.02756	0.02052	0.02213	0.01700	0.00443	0.01458	-0.00378	0.00670	-0.00559
10	0.01774	0.02032	0.00945	0.01387	0.00248	0.00465	-0.00211	0.00134	-0.00330
15	0.01301	0.01602	0.00615	0.00893	0.00227	0.00236	-0.00050	0.00049	-0.00240
20	0.01370	0.01425	0.00522	0.00888	-0.00030	0.00174	0.00062	0.00175	0.00004
25	0.01249	0.01293	0.00349	0.00889	-0.00254	0.00183	-0.00040	0.00169	0.00096
30	0.00685	0.00869	0.00256	0.00433	-0.00181	0.00143	-0.00054	0.00054	0.00023
35	0.00543	0.00716	0.00228	0.00269	-0.00040	0.00085	-0.00019	0.00015	-0.00040
40	0.00399	0.00580	0.00215	0.00082	-0.00040	0.00017	-0.00034	0.00024	0.00004
45	0.00440	0.00605	0.00240	0.00018	-0.00092	0.00035	-0.00019	0.00096	-0.00003
50	0.00431	0.00661	0.00224	-0.00029	-0.00057	0.00003	0.00010	0.00110	-0.00016
55	0.00401	0.00792	0.00168	-0.00015	-0.00103	-0.00017	-0.00085	0.00022	-0.00018
60	0.00347	0.00345	0.00095	-0.00012	-0.00149	-0.00047	-0.00037	-0.00001	0.00013
80	0.00335	0.00245	0.00043	-0.00124	-0.00131	-0.00025	-0.00014	-0.00012	0.00019
100	0.00287	0.00244	0.00041	-0.00087	-0.00108	-0.00006	-0.00009	-0.00014	0.00003
120	0.00224	0.00230	0.00040	-0.00065	-0.00050	-0.00002	0.00006	-0.00010	-0.00015
140	0.00131	0.00173	0.00032	-0.00040	-0.00004	0.00002	0.00003	-0.00007	-0.00012
160	0.00121	0.00115	0.00026	-0.00024	0.00010	0.00009	0.00005	0.00005	0.00006
180	0.00138	0.00098	0.00028	-0.00038	0.00019	-0.00023	0.00005	0.00012	0.00003
200	0.00098	0.00082	0.00019	-0.00028	0.00032	-0.00014	0.00007	0.00008	0.00002
250	0.00072	0.00035	0.00015	0.00003	-0.00026	-0.00002	0.	0.00002	-0.00002
300	0.00052	0.00032	0.00012	-0.00004	-0.00001	0.00003	0.00010	0.00003	0.00001
350	0.00032	0.00023	0.00006	-0.00008	0.00002	-0.00003	0.00001	0.00004	0.
400	0.00032	0.00017	0.00005	-0.	0.	-0.00001	0.	0.00003	-0.00001
	Coherence				Coherence				
Freq.	75-50	75-300	50-300	(ft)	Freq.	75-50	75-300	50-300	(ft)
0	0.55407	0.49637	0.11701		60	0.18665	0.10854	0.00519	
5	0.54573	0.37197	0.16767		80	0.39643	0.05699	0.04794	
10	0.55074	0.15554	0.06606		100	0.27465	0.00994	0.02049	
15	0.40734	0.07273	0.06090		120	0.13053	0.00446	0.03533	
20	0.40438	0.04771	0.04119		140	0.07131	0.00310	0.03486	
25	0.52932	0.08050	0.08372		160	0.15638	0.03719	0.02040	
30	0.37000	0.13324	0.01549		180	0.28431	0.14337	0.05576	
35	0.19023	0.06127	0.01118		200	0.22499	0.13158	0.04365	
40	0.03597	0.01684	0.00475		250	0.27183	0.00370	0.01524	
45	0.03301	0.01502	0.06353		300	0.01022	0.17468	0.02604	
50	0.01436	0.00113	0.08345		350	0.09239	0.05208	0.11594	
55	0.03411	0.11154	0.00607		400	0.	0.00625	0.11765	

Prediction Errors, B₁ Gustiness, Run No. 120,
Mast Displacement = 68 m

	75-ft level	50-ft level	300-ft level
Mean wind speed, m/sec	3.44	2.07	4.52
Variance	1.12	0.94	0.32
	<i>S</i> and <i>T</i> = 30 sec		
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	0.472	0.971	1.814
-12	0.464	0.963	1.812
-18	0.461	0.957	1.812
-24	0.464	0.955	1.813
-30	0.476	0.956	1.815
-36	0.497	0.960	1.818
-42	0.525	0.967	1.822
-48	0.557	0.976	1.828
54	0.592	0.987	1.831
-60	0.630	1.001	1.840
-90	0.819	1.081	1.861
-120	0.941	1.131	1.853
-150	1.018	1.146	1.838
150	0.903	1.254	2.103
120	0.851	1.215	2.069
90	0.754	1.150	2.035
60	0.634	1.077	1.967
54	0.613	1.065	1.948
48	0.595	1.054	1.928
42	0.580	1.045	1.909
36	0.566	1.035	1.891
30	0.551	1.024	1.874
24	0.536	1.014	1.859
18	0.520	1.004	1.846
12	0.506	0.995	1.835
6	0.493	0.987	1.825

Figures in boldface represent least error for a given time lag.

Wind Speed, B, Gustiness, Run No. 121									
			A=75	B=50	C=300	(ft)			
	Mean (m/sec)		3.90	3.17	5.46	Spectra			
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBC	QBC
0	0.09840	0.08840	0.06320	0.08325	-0.00480	0.07220	-0.00080	0.05786	0.00280
5	0.04425	0.03641	0.02534	0.03661	-0.00615	0.02654	-0.00077	0.02132	0.00298
10	0.02906	0.02517	0.01230	0.02210	-0.00420	0.01283	0.00280	0.00931	0.00379
15	0.02029	0.01939	0.00918	0.01423	-0.00552	0.00829	0.00373	0.00552	0.00381
20	0.01823	0.02018	0.00892	0.01214	-0.00853	0.00658	-0.00205	0.00600	-0.00054
25	0.01764	0.02119	0.00763	0.01036	-0.01078	0.00469	-0.00489	0.00439	-0.00151
30	0.01450	0.01623	0.00448	0.00845	-0.00675	0.00261	-0.00172	0.00185	-0.00040
35	0.00857	0.00995	0.00319	0.00490	-0.00317	-0.00013	0.00033	0.00004	-0.00066
40	0.00728	0.01259	0.00315	0.00449	-0.00487	-0.00092	0.00110	-0.00119	-0.00004
45	0.00874	0.01606	0.00450	0.00636	0.00513	0.00031	0.00234	0.00119	0.00241
50	0.00917	0.01527	0.00438	0.00562	-0.00352	0.00007	0.00189	0.00030	0.00238
55	0.00876	0.01035	0.00235	0.00201	-0.00346	-0.00012	0.00036	0.00092	0.00041
60	0.00834	0.00750	0.00124	0.00047	-0.00292	-0.00017	-0.00012	0.00013	0.00023
80	0.00432	0.00815	0.00085	-0.00890	-0.00269	0.00023	0.00040	0.00024	-0.00018
100	0.00375	0.00625	0.00075	-0.00004	-0.00212	0.00020	0.00635	-0.00004	-0.00020
120	0.00195	0.00420	0.00056	0.00035	-0.00118	0.00013	0.00009	-0.00020	0.00005
140	0.00130	0.00391	0.00015	0.00035	0.00098	-0.00005	-0.00004	-0.00017	-0.00007
160	0.00187	0.00292	0.00040	-0.00058	-0.00068	-0.00017	0.00015	-0.00018	-0.00018
180	0.00122	0.00224	0.00031	-0.00014	-0.00025	0.00064	0.00010	-0.00009	-0.00008
200	0.00122	0.00192	0.00025	0.00027	0.00005	0.00011	-0.00004	0.00012	-0.00010
250	0.00082	0.00128	0.00024	0.00014	0.00004	-0.00004	-0.00008	0.	-0.00010
300	0.00079	0.00074	0.00012	0.00001	0.00016	-0.00008	0.00014	0.00002	0.00004
350	0.00055	0.00058	0.00012	0.00008	-0.00005	0.00001	-0.00001	-0.00001	0.00002
400	0.00041	0.00036	0.00020	-0.00002	-0.00009	0.00002	-0.00004	0.00002	0.00005
Coherence									
Freq.	75-50	75-300	50-300	(ft)	Freq.	75-50	75-300	50-300	(ft)
0	0.79940	0.83833	0.60062		60	0.13984	0.00419	0.02557	
5	0.85536	0.62871	0.50228		80	0.45530	0.05798	0.01299	
10	0.69185	0.48216	0.32637		100	0.19183	0.35111	0.00887	
15	0.59214	0.44366	0.25273		120	0.18497	0.02289	0.01807	
20	0.59840	0.29210	0.20161		140	0.15386	0.00506	0.01921	
25	0.59803	0.34109	0.13330		160	0.14629	0.06872	0.05548	
30	0.49701	0.15041	0.04927		180	0.03004	0.10947	0.02088	
35	0.39942	0.00460	0.01377		200	0.03219	0.04492	0.05083	
40	0.47872	0.08967	0.03575		250	0.02020	0.04065	0.03255	
45	0.48115	0.14216	0.09996		300	0.04396	0.27426	0.02252	
50	0.31405	0.08906	0.08604		350	0.02790	0.00303	0.00718	
55	0.17660	0.00700	0.04171		400	0.05759	0.02439	0.04028	

Prediction Errors, B₁ Gustiness, Run No. 121,
Mast Displacement = 68 m

	75-ft level	50-ft level	300-ft level
Mean wind speed, m/sec	3.90	3.17	5.46
Variance	1.54	1.93	0.49
<i>s</i> and <i>T</i> = 30 sec			
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	0.600	1.356	2.431
-12	0.541	1.371	2.451
-18	0.494	1.364	2.474
-24	0.465	1.395	2.500
-30	0.458	1.403	2.527
-36	0.472	1.410	2.554
-42	0.508	1.419	2.580
-48	0.564	1.433	2.604
-54	0.636	1.450	2.627
-60	0.720	1.471	2.649
-66	1.111	1.631	2.764
-72	1.215	1.812	2.951
-78	1.314	2.049	3.179
-84	1.441	1.913	2.878
-90	1.445	1.865	2.803
90	1.493	1.688	2.669
60	1.284	1.523	2.506
54	1.225	1.490	2.479
48	1.165	1.456	2.454
42	1.105	1.423	2.432
36	1.045	1.392	2.413
30	0.986	1.366	2.400
24	0.928	1.348	2.393
18	0.868	1.336	2.391
12	0.804	1.331	2.395
6	0.736	1.333	2.403

Figures in boldface represent least error for a given time lag.

Wind Speed, B, Gustiness, Run No. 122									
			A=75		B=50		C=300 (ft)		
	Mean (m/sec)		3.50		2.78		5.50		
Spectra									
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBC	QBG
0	0.07355	0.06859	0.06600	0.04206	-0.00080	0.05632	-0.00360	0.02713	-0.00200
5	0.04164	0.03500	0.03379	0.02293	-0.00105	0.02916	-0.00829	0.01637	-0.00290
10	0.03070	0.03254	0.01971	0.01635	-0.00575	0.01615	-0.00880	0.01103	-0.00128
15	0.01781	0.03305	0.00869	0.00735	-0.00678	0.00737	-0.00373	0.00362	0.00158
20	0.01398	0.02652	0.00864	0.00265	-0.00133	0.00565	-0.00135	-0.00030	0.00066
25	0.01145	0.02030	0.00847	0.00577	-0.00432	0.00144	-0.00045	-0.00121	-0.00284
30	0.00931	0.01600	0.00517	0.00694	-0.00554	-0.00101	-0.00200	-0.00091	-0.00495
35	0.00782	0.01350	0.00293	0.00388	-0.00252	-0.00033	-0.00052	-0.00337	-0.00220
40	0.00868	0.01185	0.00275	0.00062	-0.00150	-0.00042	0.00062	-0.00332	0.00058
45	0.00803	0.00990	0.00276	0.00283	-0.00145	-0.00111	-0.00020	-0.00115	-0.00246
50	0.00763	0.00850	0.00212	0.00290	-0.00182	-0.00112	-0.00145	-0.00047	-0.00207
55	0.00551	0.00740	0.00180	0.00182	-0.00198	-0.00062	-0.00081	-0.00090	-0.00068
60	0.00339	0.00670	0.00155	0.00093	-0.00214	-0.00012	-0.00018	-0.00038	-0.00038
80	0.00149	0.00384	0.00087	-0.00082	-0.00064	-0.00009	0.00006	-0.00016	0.00002
100	0.00166	0.00255	0.00051	-0.00091	-0.00045	0.00002	0.00021	-0.00016	-0.00004
120	0.00225	0.00202	0.00036	-0.00094	-0.00065	0.00023	0.00013	-0.00014	-0.00001
140	0.00171	0.00173	0.00022	-0.00082	-0.00011	0.00013	0.00005	-0.00005	-0.00002
160	0.00101	0.00115	0.00022	-0.00012	0.00012	0.00004	-0.00001	0.00001	-0.00002
180	0.00083	0.00076	0.00029	0.00008	-0.00003	0.00008	-0.00008	0.00008	0.
200	0.00070	0.00073	0.00035	0.00012	-0.00007	0.00005	-0.00010	0.00005	-0.00003
250	0.00067	0.00058	0.00015	0.00017	-0.00002	0.00003	0.	-0.00004	-0.00002
300	0.00033	0.00045	0.00015	0.	-0.00004	0.00001	-0.00002	0.00005	-0.00008
350	0.00041	0.00054	0.00007	-0.00005	0.00005	0.	-0.00004	-0.00003	0.00006
400	0.00026	0.00019	0.00007	0.	-0.00001	0.00003	0.00003	-0.00003	-0.00002
Coherence									
Freq.	75-50	75-300	50-300	(ft)	Freq.	75-50	75-300	50-300	(ft)
0	0.35079	0.65610	0.16347		60	0.23971	0.00891	0.02781	
5	0.36153	0.65318	0.23370		80	0.18911	0.00903	0.00778	
10	0.30069	0.55902	0.19225		100	0.24347	0.05256	0.02092	
15	0.16987	0.44085	0.05432		120	0.28737	0.08617	0.02709	
20	0.02371	0.27938	0.00229		140	0.28769	0.06531	0.00762	
25	0.22353	0.02347	0.05542		160	0.15953	0.01399	0.00791	
30	0.52937	0.10430	0.30622		180	0.01157	0.05318	0.02904	
35	0.20275	0.01655	0.40948		200	0.03777	0.05102	0.01331	
40	0.02561	0.02349	0.34856		250	0.07540	0.00896	0.02299	
45	0.12719	0.05740	0.26988		300	0.01077	0.01010	0.13185	
50	0.18075	0.20753	0.25004		350	0.02258	0.05575	0.11905	
55	0.17739	0.10491	0.09553		400	0.00202	0.09890	0.09774	

Prediction Errors, B₁, Gustiness, Run No. 122,
Mast Displacement = 68 m

	75-ft level	50-ft level	300-ft level
Mean wind speed, m/sec	3.50	2.78	5.50
Variance	1.14	1.30	0.37
<i>S</i> and <i>T</i> = 30 sec			
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	0.998	1.478	3.887
-12	0.974	1.453	3.846
-18	0.958	1.431	3.804
-24	0.952	1.410	3.761
-30	0.956	1.392	3.720
-36	0.969	1.378	3.684
-42	0.991	1.368	3.654
-48	1.020	1.364	3.631
-54	1.054	1.366	3.618
60	1.090	1.371	3.613
-90	1.254	1.481	3.709
-120	1.325	1.648	3.913
-150	1.377	1.810	4.103
150	1.507	2.304	4.006
120	1.491	2.109	3.864
90	1.478	1.905	3.838
60	1.401	1.751	3.933
54	1.374	1.726	3.956
48	1.343	1.701	3.975
42	1.308	1.677	3.992
36	1.270	1.653	4.004
30	1.229	1.630	4.010
24	1.187	1.606	4.008
18	1.145	1.582	3.999
12	1.104	1.557	3.982
6	1.065	1.530	3.956

Figures in boldface represent least error for a given time lag.

Wind Speed, B, Gustiness, Run No. 125

			$\Delta=75$	$B=50$	$C=300$	(ft)			
	Mean (m/sec)		5.18	4.20	7.81				
Spectra									
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBC	QBC
0	0.12840	0.06850	0.16077	0.07953	-0.00040	0.12150	-0.00280	0.07184	-0.00520
5	0.05571	0.03681	0.06557	0.03500	-0.00047	0.04626	-0.00364	0.02756	-0.00543
10	0.03827	0.03724	0.03724	0.02824	-0.00418	0.02394	-0.00179	0.01625	-0.00346
15	0.03200	0.03684	0.02631	0.02716	-0.00257	0.01859	-0.00623	0.01640	-0.00678
20	0.02078	0.02674	0.01762	0.01747	-0.00052	0.00964	-0.00386	0.00920	-0.00473
25	0.01300	0.02539	0.01281	0.01223	-0.00390	0.00092	-0.00107	0.00254	-0.00321
30	0.01625	0.02832	0.01413	0.01115	-0.00820	-0.00133	0.00013	-0.00060	-0.00293
35	0.01692	0.02527	0.01253	0.00700	-0.00596	0.00138	0.00082	-0.00004	-0.00333
40	0.01358	0.01812	0.00784	0.00644	-0.00157	0.00256	-0.00192	0.00219	-0.00309
45	0.01060	0.01415	0.00421	0.00093	-0.00223	0.00246	-0.00152	0.00163	-0.00210
50	0.00950	0.01320	0.00358	0.00427	-0.00745	0.00224	-0.00085	0.00109	-0.00110
55	0.00845	0.01230	0.00340	0.00398	-0.00598	0.00117	-0.00085	0.00054	-0.00010
60	0.00760	0.01140	0.00263	0.00370	-0.00451	-0.00055	-0.00060	0.	0.00089
80	0.00540	0.00890	0.00119	0.00228	-0.00298	-0.00039	0.00020	-0.00019	0.00053
100	0.00369	0.00725	0.00128	0.00174	-0.00188	-0.00039	0.00028	-0.00029	-0.00008
120	0.00312	0.00670	0.00122	0.00062	-0.00150	0.00011	0.00005	-0.00051	-0.00010
140	0.00381	0.00110	0.00092	0.00060	0.00030	0.00015	0.00011	0.00005	0.00019
160	0.00373	0.00339	0.00060	-0.00016	0.00037	-0.00036	-0.00006	0.00037	-0.00009
180	0.00302	0.00349	0.00043	0.00040	0.00009	-0.00013	-0.00011	0.00021	-0.00004
200	0.00228	0.00278	0.00045	0.00020	-0.00047	-0.00012	-0.00005	0.00004	-0.00025
250	0.00189	0.00166	0.00041	0.00022	0.00014	-0.00015	-0.00004	0.00014	0.00002
300	0.00199	0.00130	0.00021	0.00008	-0.00036	-0.00004	0.00001	0.00019	0.00012
350	0.00102	0.00115	0.00016	-0.00012	-0.00002	-0.00003	0.00004	0.00001	0.00014
400	0.00131	0.00099	0.00018	-0.00007	0.00002	-0.00005	0.	0.	0.00001

Coherence				Coherence			
Freq.	75-50	75-300	50-300 (ft)	Freq.	75-50	75-300	50-300 (ft)
0	0.71915	0.71551	0.47109	50	0.39278	0.3314	0.02642
5	0.59747	0.58946	0.32691	80	0.29294	0.2989	0.02993
10	0.57184	0.40439	0.19904	100	0.24529	0.04880	0.00975
15	0.63134	0.45658	0.32492	120	0.12602	0.00581	0.03304
20	0.54975	0.29450	0.22713	140	0.02663	0.06287	0.00954
25	0.49924	0.01196	0.05132	160	0.01285	0.05952	0.07129
30	0.41626	0.00778	0.02235	180	0.01595	0.02233	0.03045
35	0.19768	0.01215	0.03503	200	0.04116	0.01647	0.05124
40	0.17856	0.06950	0.10097	250	0.02167	0.03110	0.02939
45	0.34680	0.18391	0.11863	300	0.05257	0.00407	0.18498
50	0.58800	0.16878	0.05075	350	0.01262	0.01532	0.10707
55	0.49647	0.07279	0.00721	400	0.00409	0.01060	0.00056

Prediction Errors, B, Gustiness, Run No. 125,
Mast Displacement = 68 m

	75-ft level	50-ft level	300-ft level
Mean wind speed, m/sec	5.18	4.20	7.81
Variance	2.79	2.59	1.80
<i>S</i> and <i>T</i> = 30 sec			
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	0.787	2.050	3.998
12	0.761	2.035	3.960
-18	0.760	2.029	3.930
-24	0.783	2.033	3.908
-30	0.830	2.047	3.895
-36	0.898	2.070	3.890
-42	0.982	2.101	3.895
-48	1.076	2.139	3.912
-54	1.176	2.183	3.942
-60	1.276	2.233	3.981
-90	1.676	2.500	4.279
-120	1.869	2.702	4.643
-150	1.969	2.899	4.944
150	2.000	3.245	5.202
120	1.877	3.018	5.060
90	1.753	2.805	4.971
60	1.609	2.551	4.755
54	1.565	2.496	4.687
48	1.509	2.440	4.614
42	1.442	2.383	4.537
36	1.364	2.325	4.459
30	1.277	2.270	4.381
24	1.183	2.219	4.306
18	1.087	2.173	4.236
12	0.995	2.134	4.168
6	0.910	2.100	4.103

Figures in boldface represent least error for a given time lag.

Wind Speed, B₁ Gustiness, Run No. 126

	A=75		B=50		C=300		(ft)		
	Mean (m/sec)		3.56		3.09		4.54		
	Spectra								
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBC	QBC
0	0.08114	0.08866	0.06890	0.01765	-0.00360	0.05775	-0.00160	0.00642	0.00080
5	0.04445	0.05350	0.03379	0.01542	-0.00709	0.03017	-0.00180	0.00625	-0.00044
10	0.03949	0.04450	0.03131	0.01318	-0.01058	0.02742	-0.00031	0.00608	-0.00167
15	0.02210	0.02300	0.02358	0.01094	-0.00362	0.01362	0.00032	0.00591	-0.00290
20	0.01245	0.01545	0.01617	0.00870	0.00334	0.00353	-0.00405	0.00575	-0.00413
25	0.01198	0.01420	0.01106	0.00800	0.00356	0.00279	-0.00307	0.00506	-0.00357
30	0.01374	0.01290	0.00537	0.00730	0.00378	0.00214	0.00011	0.00436	-0.00302
35	0.01240	0.01200	0.00333	0.00660	0.00400	0.00119	-0.00026	0.00367	-0.00247
40	0.01201	0.01105	0.00306	0.00590	0.00421	0.00108	-0.00030	0.00297	-0.00192
45	0.01275	0.00900	0.00457	0.00473	0.00364	0.00032	0.00053	0.00212	-0.00153
50	0.00900	0.00745	0.00402	0.00357	0.00347	0.00069	-0.00001	0.00187	-0.00115
55	0.00745	0.00620	0.00350	0.00241	0.00307	0.00049	0.00001	0.00132	-0.00077
60	0.00610	0.00520	0.00297	0.00125	0.00273	0.00030	0.00056	0.00077	-0.00039
80	0.00216	0.00363	0.00242	-0.00031	0.00105	0.00064	0.00024	-0.00015	-0.00043
100	0.00171	0.00258	0.00127	-0.00029	0.00052	0.00075	0.00010	-0.00050	-0.00030
120	0.00137	0.00155	0.00067	0.00002	0.00032	-0.00032	-0.00010	-0.00029	-0.00007
140	0.00111	0.00101	0.00068	0.00010	0.00021	0.00017	0.00013	0.00014	0.00019
160	0.00142	0.00064	0.00076	-0.00020	0.00004	-0.00024	0.00001	-0.00003	-0.00007
180	0.00104	0.00046	0.00066	-0.00013	0.00001	-0.00003	-0.00010	0.00010	-0.00007
200	0.00055	0.00051	0.00049	-0.00008	-0.00001	-0.00008	-0.00013	0.00003	0.00001
250	0.00044	0.00036	0.00030	0.00005	-0.00014	0.	-0.00001	-0.00006	-0.00003
300	0.00023	0.00026	0.00031	0.00001	0.00001	0.00001	0.00010	-0.00009	-0.00006
350	0.00028	0.00022	0.00019	0.	0.00004	0.00001	-0.00002	0.00003	0.
400	0.00018	0.00012	0.00014	-0.00004	0.	-0.00004	0.	-0.00001	0.00003
	Coherence				Coherence				
Freq.	75-50	75-300	50-300	(ft)	Freq.	75-50	75-300	50-300	(ft)
0	0.04511	0.59701	0.00685		60	0.28422	0.02228	0.04824	
5	0.12113	0.60818	0.02172		80	0.15287	0.08938	0.02361	
10	0.16255	0.60816	0.02853		100	0.08035	0.26362	0.10377	
15	0.26124	0.35617	0.07991		120	0.04841	0.12245	0.08570	
20	0.45149	0.14337	0.20062		140	0.04355	0.05476	0.08110	
25	0.45071	0.12988	0.24418		160	0.04577	0.05347	0.01192	
30	0.38127	0.06223	0.40607		180	0.03554	0.01588	0.04908	
35	0.40027	0.03593	0.48973		200	0.02317	0.08646	0.00400	
40	0.39585	0.03419	0.36990		250	0.13952	0.00076	0.04167	
45	0.32347	0.00688	0.20842		300	0.00334	0.14165	0.14516	
50	0.36986	0.01316	0.16092		350	0.02597	0.00940	0.02153	
55	0.32979	0.00921	0.10762		400	0.07407	0.06349	0.05952	

Prediction Errors, B₁, Gustiness, Run No. 126,
Mast Displacement = 68 m

	75-ft level	50-ft level	300-ft level
Mean wind speed, m/sec	3.56	3.09	4.54
Variance	1.32	1.12	1.04
<i>S</i> and <i>T</i> = 30 sec			
<i>L</i> , sec	75-50	75-300	50-300 (ft)
-6	1.301	1.167	2.514
-12	1.347	1.170	2.491
-18	1.397	1.178	2.481
-24	1.449	1.192	2.482
-30	1.502	1.209	2.494
-36	1.551	1.228	2.518
-42	1.596	1.248	2.551
-48	1.635	1.270	2.591
-54	1.667	1.293	2.636
-60	1.693	1.318	2.684
-90	1.737	1.473	2.906
-120	1.710	1.674	3.033
-150	1.705	1.870	3.097
150	2.043	1.917	3.134
120	2.029	1.801	3.181
90	1.903	1.654	3.205
60	1.580	1.471	3.086
54	1.505	1.432	3.042
48	1.433	1.394	2.991
42	1.367	1.354	2.934
36	1.310	1.315	2.875
30	1.264	1.278	2.815
24	1.233	1.245	2.755
18	1.218	1.218	2.696
12	1.219	1.196	2.640
6	1.235	1.180	2.590

Figures in boldface represent least error for a given time lag.

APPENDIX II

Wind Speed Components, B, Gustiness, Run No. 913										
			A=75u	B=75v	C=300	(ft)				
	Mean (m/sec)		6.32	0.03	9.28					
	St. dev.		1.73	1.57	1.72					
Spectra										
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBC	QBC	
0	0.17954	0.05085	0.37591	-0.03003	0.00800	0.20801	-0.00560	-0.00587	-0.00640	
5	0.08367	0.02635	0.14301	-0.01207	0.01179	0.07704	-0.00889	-0.00318	-0.00917	
10	0.05668	0.03008	0.07612	-0.00610	0.00133	0.03765	-0.01404	-0.00244	0.00110	
15	0.03642	0.02652	0.04378	-0.00328	-0.00130	0.02294	-0.00794	-0.00180	-0.00028	
20	0.03331	0.01784	0.03397	-0.00018	0.00717	0.01755	-0.01186	-0.00355	-0.00732	
25	0.02747	0.01669	0.02631	0.00436	0.00383	0.00794	-0.01200	-0.00508	-0.00158	
30	0.02635	0.01463	0.02132	0.00389	0.00438	0.00330	-0.00881	-0.00497	-0.00076	
35	0.02001	0.01160	0.01828	-0.00081	0.00708	0.00184	-0.00516	-0.00208	-0.00118	
40	0.01949	0.01084	0.01515	-0.00206	0.00422	0.00107	0.00029	0.00010	-0.00199	
45	0.02525	0.01447	0.01479	-0.00105	0.00163	0.00395	0.00020	0.00215	-0.00105	
50	0.02761	0.01921	0.01633	0.00072	0.00166	0.00855	-0.00162	0.00146	-0.00130	
55	0.02090	0.01462	0.01527	0.00204	0.00083	0.00654	-0.00345	0.00136	-0.00113	
60	0.01390	0.00900	0.01095	0.00080	0.00064	0.00166	-0.00263	0.00132	-0.00088	
80	0.01220	0.00940	0.00500	0.00138	0.00080	-0.00146	-0.00143	0.00086	0.00010	
100	0.00910	0.00615	0.00374	0.00006	0.00012	0.00264	0.00027	0.00012	-0.00026	
120	0.00635	0.00361	0.00226	0.00035	0.00019	0.00136	0.00072	0.00040	0.00016	
140	0.00505	0.00493	0.00183	-0.00111	0.00037	-0.00050	-0.00013	-0.00060	-0.00031	
160	0.00384	0.00530	0.00156	-0.00158	0.00098	-0.00009	-0.00025	-0.00026	-0.00058	
180	0.00271	0.00376	0.00126	-0.00130	0.00020	-0.00009	0.00016	0.00003	-0.00082	
200	0.00196	0.00305	0.00106	-0.00033	0.00020	-0.00024	0.00013	-0.00019	-0.00034	
250	0.00112	0.00218	0.00053	0.00028	-0.00036	-0.00005	-0.00006	-0.00014	-0.00014	
300	0.00092	0.00299	0.00050	0.00022	-0.00008	-0.00015	-0.00016	-0.00033	0.00025	
350	0.00071	0.00223	0.00021	0.00033	0.00003	-0.00008	0.00002	0.00004	0.	
400	0.00093	0.00224	0.00017	-0.00014	-0.00019	-0.00004	0.00001	0.00001	0.00005	
Coherence										
Freq.	75u-75v	75u-300	75v-300	(ft)		Freq.	75u-75v	75u-300	75v-300	(ft)
0	0.10579	0.64156	0.00395		60	0.00839	0.06355	0.02554		
5	0.12913	0.50262	0.02500		80	0.02219	0.06847	0.01595		
10	0.02286	0.37424	0.00313		100	0.00093	0.20693	0.04774		
15	0.01289	0.36958	0.00286		120	0.00612	0.14321	0.02709		
20	0.08657	0.39651	0.10921		140	0.05499	0.02888	0.05055		
25	0.07346	0.28647	0.06445		160	0.16985	0.01179	0.04886		
30	0.08902	0.15755	0.08104		180	0.16978	0.00987	0.14212		
35	0.21878	0.08205	0.02697		200	0.02491	0.03586	0.04692		
40	0.10438	0.00416	0.02417		250	0.08519	0.01028	0.03393		
45	0.01029	0.04189	0.02675		300	0.01992	0.10457	0.11465		
50	0.00617	0.16796	0.01218		350	0.06935	0.04561	0.00342		
55	0.01587	0.17132	0.01400		400	0.02674	0.01075	0.00683		

Wind Speed Components, B₁ Gustiness, Run No. 913 (Cont'd)

Ht.	<i>g(T)</i>								(sec)
	3	6	12	30	60	120	180	300	
75 _μ	3.478	3.375	3.297	3.067	2.926	2.168	1.585	1.151	
75 _v	2.368	2.188	2.060	1.746	1.610	1.057	0.687	0.435	
300	3.590	3.545	3.511	3.407	3.336	2.912	2.449	1.986	
A-B	-0.173	-0.173	-0.172	-0.162	-0.151	-0.147	-0.159	-0.157	
A-C	1.342	1.349	1.355	1.375	1.383	1.384	1.253	1.064	
B-C	-0.101	-0.095	-0.091	-0.081	-0.078	-0.094	-0.085	-0.044	

ONE-LAYER MODEL									
<i>C(T)</i>									
	3	6	12	30	60	120	180	300	(sec)
A-B	0.000	0.000	0.000	0.001	0.001	0.001	0.001	0.001	
A-C	1.382	1.385	1.388	1.396	1.400	1.426	1.442	1.453	
B-C	0.075	0.084	0.091	0.113	0.124	0.175	0.280	0.537	
Error (<i>T</i>)									
A-B	1.539	1.480	1.435	1.322	1.269	1.028	0.830	0.660	
A-C	2.612	2.562	2.522	2.399	2.320	1.856	1.469	1.155	
B-C	9.471	9.468	9.466	9.461	9.457	9.434	9.408	9.380	

TWO-LAYER MODEL									
<i>C(T)</i>									
	3	6	12	30	60	120	180	300	(sec)
75 _v	0.065	0.073	0.079	0.091	0.090	0.118	0.215	0.429	
300	1.382	1.385	1.388	1.396	1.400	1.426	1.442	1.453	
Error (<i>T</i>)									
300	2.610	2.559	2.519	2.396	2.318	1.852	1.458	1.120	

IDEAL MODEL									
Error (<i>T</i>)									
	3	6	12	30	60	120	180	300	(sec)
A-B	1.494	1.435	1.392	1.282	1.232	0.993	0.798	0.633	
A-C	1.484	1.470	1.460	1.426	1.404	1.265	1.106	0.955	
B-C	1.871	1.860	1.851	1.824	1.805	1.688	1.550	1.400	

Wind Speed, C Gustiness, Run No. 023

	A=75		B=150		C=300		(ft)		
	Mean (m/sec)		9.41		11.80		14.20		
	St. dev.		2.11		2.45		2.42		
Spectra									
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBC	QBC
0	0.07801	0.09142	0.06664	0.07966	-0.00160	0.05806	0.00240	0.06663	0.00080
5	0.06376	0.08448	0.06296	0.06557	-0.00205	0.04686	0.00449	0.05612	0.00147
10	0.03622	0.06385	0.06364	0.03827	-0.00651	0.03315	-0.00735	0.04625	-0.00532
15	0.03200	0.05199	0.06168	0.03073	-0.00370	0.02147	-0.00680	0.03915	-0.00381
20	0.04471	0.05435	0.05140	0.03726	-0.00614	0.01663	-0.00850	0.03748	-0.00100
25	0.05448	0.05817	0.06463	0.04201	-0.00999	0.02793	-0.02142	0.04547	-0.01399
30	0.04555	0.04555	0.05984	0.03743	-0.00520	0.02081	-0.01876	0.03004	-0.02103
35	0.03751	0.04602	0.05401	0.02873	-0.00772	0.00524	-0.01506	0.02107	-0.02299
40	0.03730	0.05157	0.04458	0.02943	-0.01716	0.00615	-0.01611	0.02462	-0.01739
45	0.02674	0.04046	0.05082	0.02159	-0.00589	0.00667	-0.00968	0.02344	-0.00473
50	0.02250	0.03010	0.04857	0.01916	-0.00164	0.00430	-0.00500	0.01205	-0.00714
55	0.02150	0.02850	0.02727	0.01787	-0.00131	0.00345	-0.00380	0.00695	-0.00691
60	0.02035	0.02705	0.02055	0.01675	-0.00100	0.00298	-0.00294	0.00530	-0.00655
80	0.01340	0.01850	0.01890	0.00989	-0.00008	0.00014	-0.00268	0.00021	-0.00670
100	0.00860	0.01555	0.01160	0.00635	-0.00006	-0.00258	-0.00120	-0.00002	-0.00173
120	0.00940	0.01375	0.00850	0.00695	-0.00138	-0.00222	-0.00174	-0.00050	-0.00078
140	0.01100	0.01115	0.00965	0.00695	-0.00347	-0.00124	-0.00028	-0.00162	-0.00136
160	0.00950	0.00940	0.00895	0.00416	-0.00254	-0.00014	0.00107	-0.00092	-0.00212
180	0.00640	0.00695	0.00595	0.00142	-0.00113	-0.00034	0.00097	0.00046	-0.00167
200	0.00655	0.00600	0.00459	0.00187	-0.00144	-0.00062	0.00114	0.00091	-0.00056
250	0.00515	0.00437	0.00428	-0.00034	-0.00102	0.00082	0.00061	0.00067	-0.00132
300	0.00284	0.00305	0.00196	0.00038	-0.00066	0.00024	-0.00007	0.00026	0.00027
350	0.00237	0.00233	0.00159	0.00032	-0.00043	-0.00007	0.00030	-0.00013	-0.00008
400	0.00163	0.00180	0.00146	-0.00008	-0.00058	-0.00025	0.00016	-0.00009	-0.00062
Coherence									
Freq.	75-150	75-300	150-300	(ft)	Freq.	75-150	75-300	150-300	(ft)
0	0.89015	0.64955	0.72883		60	0.51150	0.04190	0.12771	
5	0.79897	0.55203	0.59254		80	0.39459	0.02844	0.12851	
10	0.65162	0.50018	0.53339		100	0.30155	0.08116	0.01659	
15	0.57585	0.25697	0.48250		120	0.38845	0.09957	0.00734	
20	0.58684	0.15178	0.50321		140	0.49200	0.01522	0.04158	
25	0.58838	0.35186	0.60200		160	0.26604	0.01370	0.06348	
30	0.68828	0.28800	0.49333		180	0.07404	0.02774	0.07256	
35	0.51269	0.12550	0.39126		200	0.14174	0.05601	0.04146	
40	0.60336	0.17882	0.39520		250	0.05137	0.04739	0.11716	
45	0.46291	0.10169	0.27809		300	0.06696	0.01123	0.02350	
50	0.54602	0.03980	0.13718		350	0.05203	0.02518	0.00629	
55	0.52395	0.04493	0.12359		400	0.11684	0.03702	0.14935	

Wind Speed, C Gustiness, Run No. 023 (Cont'd)

Ht.	$g(T)$								(sec)
	3	6	12	30	60	120	180	300	
75	4.375	4.127	3.940	3.416	3.151	2.113	1.319	0.749	
150	5.448	5.188	4.991	4.429	4.125	2.758	1.743	1.031	
300	5.116	4.905	4.743	4.273	4.009	2.752	1.661	0.892	
A-B	3.007	2.949	2.900	2.727	2.599	1.865	1.230	0.751	
A-C	1.036	1.036	1.037	1.043	1.046	1.015	0.801	0.538	
B-C	1.959	1.945	1.934	1.900	1.877	1.658	1.186	0.714	

ONE-LAYER MODEL

Ht.	$G(T)$								(sec)
	3	6	12	30	60	120	180	300	
A-B	1.227	1.230	1.232	1.237	1.239	1.245	1.249	1.252	
A-C	1.449	1.453	1.456	1.464	1.469	1.485	1.496	1.502	
B-C	1.172	1.174	1.175	1.180	1.182	1.192	1.197	1.200	
Error (T)									
A-B	2.173	2.056	1.967	1.713	1.594	1.182	0.855	0.571	
A-C	3.409	3.299	3.213	2.953	2.807	2.109	1.493	0.985	
B-C	2.854	2.758	2.684	2.456	2.324	1.654	1.152	0.815	

Two-LAYER MODEL

Ht.	$G(T)$								(sec)
	3	6	12	30	60	120	180	300	
150	0.901	0.918	0.932	0.978	1.004	1.110	1.115	0.991	
300	0.343	0.324	0.308	0.254	0.225	0.103	0.103	0.261	
Error (T)									
300	2.791	2.706	2.639	2.431	2.306	1.651	1.149	0.807	

IDEAL MODEL

Error (T)								
A-B	1.676	1.612	1.561	1.416	1.341	1.008	0.742	0.515
A-C	2.039	1.989	1.950	1.831	1.762	1.397	1.015	0.685
B-C	1.886	1.834	1.793	1.668	1.596	1.225	0.880	0.620

Wind Speed Components, C Gustiness, Run No. 023									
			A=75u		B=75v		C=300 (ft)		
	Mean (m/sec)		9.38	0.07	14.20				
	St. dev.		2.16	2.06	2.42				
Spectra									
Freq.	A	B	C	CAB	QAB	CAC	QAC	CBC	QBC
0	0.15409	0.13137	0.12922	0.01090	0.00400	0.11486	-0.00040	0.02766	-0.00080
5	0.06255	0.04626	0.06115	-0.00396	0.00583	0.04646	-0.00044	0.00231	-0.00199
10	0.03540	0.02496	0.06159	-0.00376	-0.00315	0.03233	-0.00688	0.00166	0.00227
15	0.03221	0.01722	0.05936	0.00330	0.00193	0.02059	-0.00554	0.00598	0.00377
20	0.04646	0.01637	0.05457	0.00890	0.00813	0.01587	-0.00708	0.00695	0.00180
25	0.05678	0.01704	0.06463	0.01016	0.00995	0.02816	-0.02135	0.01096	-0.00589
30	0.04777	0.01367	0.06057	0.00409	0.00714	0.02120	-0.01960	0.00428	-0.00682
35	0.03884	0.01192	0.05347	0.00287	0.00346	0.00474	-0.01570	-0.00444	-0.00721
40	0.03700	0.01302	0.04312	0.00149	0.00112	0.00492	-0.01594	-0.00329	-0.00161
45	0.02517	0.01479	0.03742	0.00063	0.00184	0.00452	-0.00978	-0.00330	-0.00172
50	0.02860	0.01246	0.03173	-0.00018	0.00257	0.00412	-0.00901	-0.00329	-0.00183
55	0.02440	0.01218	0.02604	-0.00106	0.00329	0.00372	-0.00554	-0.00329	-0.00193
60	0.02020	0.01190	0.02035	-0.00195	0.00402	0.00332	-0.00208	-0.00329	-0.00204
80	0.01385	0.00855	0.01790	-0.00100	0.00134	0.00038	-0.00223	-0.00062	-0.00110
100	0.00925	0.01000	0.01100	-0.00228	0.00207	-0.00250	-0.00142	0.00277	0.00028
120	0.00975	0.01110	0.00810	-0.00156	0.00310	-0.00248	-0.00178	0.00139	-0.00048
140	0.01110	0.01020	0.00925	0.00050	0.00140	-0.00168	0.00035	-0.00057	-0.00286
160	0.00985	0.00800	0.00870	-0.00015	-0.00006	-0.00043	0.00179	-0.00083	-0.00268
180	0.00700	0.00655	0.00605	-0.00068	-0.00084	-0.00027	0.00148	-0.00059	-0.00214
200	0.00695	0.00640	0.00479	-0.00067	-0.00061	-0.00046	0.00266	-0.00040	-0.00102
250	0.00574	0.00499	0.00428	-0.00046	0.00093	0.00076	0.00087	0.00011	-0.00014
300	0.00342	0.00497	0.00214	-0.00010	-0.00006	0.00024	0.00003	-0.00080	-0.00010
350	0.00284	0.00528	0.00156	-0.00016	0.00130	-0.00043	0.00044	0.00032	0.00038
400	0.00210	0.00505	0.00165	-0.00092	0.00024	-0.00073	0.00006	0.00092	-0.00038
Coherence									
Freq.	75u-75v	75u-300	75v-300 (ft)		Freq.	75u-75v	75u-300	75v-300 (ft)	
0	0.00666	0.66258	0.04511		60	0.08305	0.03734	0.06188	
5	0.01717	0.56438	0.00329		80	0.02361	0.02064	0.01042	
10	0.02723	0.50111	0.00514		100	0.10252	0.08124	0.07047	
15	0.02635	0.23778	0.04889		120	0.11128	0.11800	0.02405	
20	0.19105	0.11911	0.05770		140	0.01952	0.02868	0.09014	
25	0.20901	0.34030	0.14057		160	0.00033	0.03955	0.11309	
30	0.10368	0.28810	0.07830		180	0.02547	0.05344	0.12435	
35	0.04365	0.12951	0.11249		200	0.01846	0.21890	0.03916	
40	0.00721	0.17443	0.02390		250	0.03758	0.05432	0.00148	
45	0.00999	0.12037	0.02502		300	0.00080	0.00799	0.06111	
50	0.01863	0.10816	0.03585		350	0.11441	0.08543	0.02996	
55	0.04020	0.07008	0.04587		400	0.08524	0.15483	0.11891	

Wind Speed Components, C Gustiness, Run No. 023 (Cont'd)

Ht.	<i>g(T)</i>								(sec)
	3	6	12	30	60	120	180	300	
75 <u>u</u>	4.775	4.494	4.285	3.713	3.433	2.349	1.520	0.934	
75 <u>v</u>	3.521	3.159	2.904	2.307	2.073	1.294	0.925	0.690	
300	5.062	4.848	4.686	4.221	3.966	2.794	1.790	1.025	
A-B	-0.068	-0.038	-0.017	0.027	0.044	0.103	0.074	0.013	
A-C	1.113	1.127	1.137	1.154	1.159	1.136	0.930	0.672	
B-C	0.136	0.127	0.124	0.132	0.139	0.141	0.164	0.103	

ONE-LAYER MODEL

Ht.	<i>C(T)</i>								(sec)
	3	6	12	30	60	120	180	300	
A-B	0.006	0.007	0.007	0.007	0.008	0.008	0.008	0.008	
A-C	1.448	1.452	1.456	1.465	1.470	1.487	1.499	1.506	
B-C	0.320	0.354	0.384	0.487	0.545	0.874	1.246	1.578	
Error (<i>T</i>)									
A-B	1.877	1.777	1.704	1.519	1.440	1.137	0.961	0.831	
A-C	3.498	3.374	3.279	3.003	2.855	2.162	1.561	1.061	
B-C	14.365	14.356	14.349	14.329	14.317	14.263	14.212	14.175	

TWO-LAYER MODEL

Ht.	<i>C(T)</i>								(sec)
	3	6	12	30	60	120	180	300	
75 <u>v</u>	0.079	0.070	0.065	0.054	0.050	0.003	0.069	0.130	
300	1.447	1.452	1.455	1.465	1.469	1.487	1.498	1.505	
Error (<i>T</i>)									
300	3.494	3.372	3.278	3.002	2.854	2.162	1.559	1.055	

IDEAL MODEL

	<i>Error (T)</i>								
	A-B	A-C	B-C	A-B	A-C	B-C	A-B	A-C	
A-B	1.829	1.733	1.662	1.481	1.403	1.111	0.943	0.823	
A-C	1.993	1.943	1.905	1.789	1.723	1.381	1.036	0.712	
B-C	2.188	2.141	2.105	1.998	1.937	1.626	1.306	0.998	

V1 Brookhaven National Laboratory, Upton, Long Island, New York A STUDY OF THE WIND PROFILE IN THE LOWEST 400 FEET OF THE ATMOSPHERE Irving A. Singer and Constance M. Nagle Progress Report No. 9, May 16, 1961, through September 15, 1961, 14 pp., 2 figures. Signal Corps Contract No. R-65-8-99812 SC-04-91. DA Project No. 3A99-07-001-03. Unclassified Report. This report continues the analysis of errors in predicting upper level wind speeds from speeds at a lower reference level by utilizing an unweighted predictor of varying averaging length and relative displacement in time. Data were obtained by displacing a 50-ft mast 68, 152, and 225 meters from the Ace tower. These data were then analyzed to determine the location producing the least prediction error. A study of the prediction of wind speed was made by using horizontal components at the reference level; however, no improvement occurred in the prediction errors.	Accession No. AD..... Brookhaven National Laboratory, Upton, Long Island, New York A STUDY OF THE WIND PROFILE IN THE LOWEST 400 FEET OF THE ATMOSPHERE Irving A. Singer and Constance M. Nagle Progress Report No. 9, May 16, 1961, through September 15, 1961, 14 pp., 2 figures. Signal Corps Contract No. R-65-8-99812 SC-04-91. DA Project No. 3A99-07-001-03. Unclassified Report. This report continues the analysis of errors in predicting upper level wind speeds from speeds at a lower reference level by utilizing an unweighted predictor of varying averaging length and relative displacement in time. Data were obtained by displacing a 50-ft mast 68, 152, and 225 meters from the Ace tower. These data were then analyzed to determine the location producing the least prediction error. A study of the prediction of wind speed was made by using horizontal components at the reference level; however, no improvement occurred in the prediction errors.	Unclassified 1. Micrometeorology 2. Turbulence 3. Signal Corps Contract No. R-65-8-99812 SC-04-91	Unclassified 1. Micrometeorology 2. Turbulence 3. Signal Corps Contract No. R-65-8-99812 SC-04-91
V1 Brookhaven National Laboratory, Upton, Long Island, New York A STUDY OF THE WIND PROFILE IN THE LOWEST 400 FEET OF THE ATMOSPHERE Irving A. Singer and Constance M. Nagle Progress Report No. 9, May 16, 1961, through September 15, 1961, 14 pp., 2 figures. Signal Corps Contract No. R-65-8-99812 SC-04-91. DA Project No. 3A99-07-001-03. Unclassified Report. This report continues the analysis of errors in predicting upper level wind speeds from speeds at a lower reference level by utilizing an unweighted predictor of varying averaging length and relative displacement in time. Data were obtained by displacing a 50-ft mast 68, 152, and 225 meters from the Ace tower. These data were then analyzed to determine the location producing the least prediction error. A study of the prediction of wind speed was made by using horizontal components at the reference level; however, no improvement occurred in the prediction errors.	Accession No. AD..... Brookhaven National Laboratory, Upton, Long Island, New York A STUDY OF THE WIND PROFILE IN THE LOWEST 400 FEET OF THE ATMOSPHERE Irving A. Singer and Constance M. Nagle Progress Report No. 9, May 16, 1961, through September 15, 1961, 14 pp., 2 figures. Signal Corps Contract No. R-65-8-99812 SC-04-91. DA Project No. 3A99-07-001-03. Unclassified Report. This report continues the analysis of errors in predicting upper level wind speeds from speeds at a lower reference level by utilizing an unweighted predictor of varying averaging length and relative displacement in time. Data were obtained by displacing a 50-ft mast 68, 152, and 225 meters from the Ace tower. These data were then analyzed to determine the location producing the least prediction error. A study of the prediction of wind speed was made by using horizontal components at the reference level; however, no improvement occurred in the prediction errors.	Unclassified 1. Micrometeorology 2. Turbulence 3. Signal Corps Contract No. R-65-8-99812 SC-04-91	Unclassified 1. Micrometeorology 2. Turbulence 3. Signal Corps Contract No. R-65-8-99812 SC-04-91

<p>AD Accession No. AD Accession No.</p> <p>Brookhaven National Laboratory, Upton, Long Island, New York</p> <p>A STUDY OF THE WIND PROFILE IN THE LOWEST 400 FEET OF THE ATMOSPHERE</p> <p>IRVING A. SINGER AND CONSTANCE M. NAGUS</p> <p>Progress Report No. 9, May 16, 1961, through September 15, 1961, 44 pp., 2 figures. Signal Corps Contract No. R-65-8-99812 SC-04-91, DA Project No. 3A99-07-001-03, Unclassified Report.</p> <p>This report continues the analysis of errors in predicting upper level wind speeds from speeds at a lower reference level by utilizing an unweighted predictor of varying averaging length and relative displacement in time. Data were obtained by displacing a 50-ft mast 68, 152, and 225 meters from the Ace tower. These data were then analyzed to determine the location producing the least prediction error.</p> <p>A study of the prediction of wind speed was made by using horizontal components at the reference level; however, no improvement occurred in the prediction errors.</p>	<p>Unclassified</p> <p>1. Micrometeorology</p> <p>2. Turbulence</p> <p>3. Signal Corps Contract No. R-65-8-99812 SC-04-91</p>	<p>Unclassified</p> <p>1. Micrometeorology</p> <p>2. Turbulence</p> <p>3. Signal Corps Contract No. R-65-8-99812 SC-04-91</p>
<p>AD Accession No. AD Accession No.</p> <p>Brookhaven National Laboratory, Upton, Long Island, New York</p> <p>A STUDY OF THE WIND PROFILE IN THE LOWEST 400 FEET OF THE ATMOSPHERE</p> <p>IRVING A. SINGER AND CONSTANCE M. NAGUS</p> <p>Progress Report No. 9, May 16, 1961, through September 15, 1961, 44 pp., 2 figures. Signal Corps Contract No. R-65-8-99812 SC-04-91, DA Project No. 3A99-07-001-03, Unclassified Report.</p> <p>This report continues the analysis of errors in predicting upper level wind speeds from speeds at a lower reference level by utilizing an unweighted predictor of varying averaging length and relative displacement in time. Data were obtained by displacing a 50-ft mast 68, 152, and 225 meters from the Ace tower. These data were then analyzed to determine the location producing the least prediction error.</p> <p>A study of the prediction of wind speed was made by using horizontal components at the reference level; however, no improvement occurred in the prediction errors.</p>	<p>Unclassified</p> <p>1. Micrometeorology</p> <p>2. Turbulence</p> <p>3. Signal Corps Contract No. R-65-8-99812 SC-04-91</p>	<p>Unclassified</p> <p>1. Micrometeorology</p> <p>2. Turbulence</p> <p>3. Signal Corps Contract No. R-65-8-99812 SC-04-91</p>

DISTRIBUTION LIST

ADDRESSEE	COPIES
ARDC Liaison Office, U.S. Army Signal Research & Development Laboratory, Fort Monmouth, N.J. ATTN: SIGRA/SL-LNA	1
USCONARC Liaison Office, U.S. Army Signal Research & Development Laboratory, Fort Monmouth, N.J. ATTN: SIGRA/SL-LNP	3
Commanding Officer, U.S. Army Signal Research & Development Laboratory, Fort Monmouth, N.J. ATTN: SIGRA/SL-DR	1
Commanding Officer, U.S. Army Signal Research & Development Laboratory, Fort Monmouth, N.J. ATTN: SIGRA/SL-ADT	1
Commanding Officer, U.S. Army Signal Research & Development Laboratory, Fort Monmouth, N.J. ATTN: SIGR/SL-ADJ (Responsible File & Record Unit)	1
Commanding Officer, U.S. Army Signal Research & Development Laboratory, Fort Monmouth, N.J. ATTN: SIGRA/SL-TNR	8
Commanding Officer, U.S. Army Signal Research & Development Laboratory, Fort Monmouth, N.J. ATTN: SIGRA/SL-SMA	8
OASD (R&E), Rm 3E1065, The Pentagon, Washington 25, D.C. ATTN: Technical Library	1
Chief of Research and Development, OCS, Department of the Army, Washington 25, D.C.	1
Chief Signal Officer, Department of the Army, Washington 25, D.C. ATTN: SIGRD	1
Director, U.S. Naval Research Laboratory, Washington 25, D.C. ATTN: Code 2027	1
Commander, WADD (WCOSI-3), Wright-Patterson Air Force Base, Ohio	1
Commander, Air Force Command & Control Development Division, Air Research & Development Command, USAF, Laurence Hanscom Field, Bedford, Mass. ATTN: CROFL	1
Commanding General, U.S. Army Electronic Proving Ground, Fort Huachuca, Ariz.	1
Commander, Armed Services Technical Information Agency, Arlington Hall Station, Arlington 12, Va. ATTN: TIPDR	10
Chairman, U.S. Army Chemical Corps Meteorological Committee, Ft. Detrick, Frederick, Md.	1

DISTRIBUTION LIST

<u>Agency</u>	<u>Copies</u>
Chief, Meteorology Division, U.S. Army Chemical Corps Proving Ground, Dogway Proving Ground, Colo.	1
Director, Atmospheric Sciences Programs, National Science Foundation, Washington 25, D.C.	1
Director, Bureau of Research & Development, Federal Aviation Agency, Washington 25, D.C.	1
Officer in Charge, Meteorological Curriculum, U.S. Naval Post Graduate School, Monterey, Calif.	1
Officer in Charge, U.S. Naval Weather Research Facility, U.S. Naval Air Station, Bldg. K-10, Norfolk, Va.	1
Office of the Chief of Ordnance, Department of the Army, Washington 25, D.C.	1
Chief, Research Laboratories, R&D Operations, Army Ballistic Missile Agency, Redstone Arsenal, Huntsville, Ala. Attn: Mr. Reiley	1
Commanding Officer, U.S. Army Signal Missile Support Agency, White Sands Missile Range, N.M. Attn: Missile Geophysics Division	1
Commanding Officer, Redstone Arsenal, Huntsville, Ala. Attn: Mr. J. Robbins, ORDEW MKP	1
University of Illinois, General Engineering Department, 116 Transportation Bldg., Urbana, Ill. Attn: Dr. J.E. Pearson	1
Director, Federal Aviation Agency, Pomona, N.J. Attn: Mr. Hibnerod	1
Signal Corps Liaison Office, MIT, 77 Massachusetts Ave., Bldg. 200-116, Cambridge 39, Mass. Attn: Mr. A. Bedrosian	1
Library, U.S. Weather Bureau, Washington 25, D.C.	1
Department of Meteorology and Oceanography, New York University, College of Engineering, University Heights, New York 53, N.Y.	1
Meteorology Department, Pennsylvania State University, University Park, Pa.	1
Commanding Officer, TRECOP, Ft. Eustis, Va. ATTN: Lt. Col. Walter F. Molesky	1
Central Intelligence Agency, Washington 25, D.C. OCR/Standard Distribution	1
Douglas Aircraft Company, 1820 Statesville, Charlotte 6, N.C. ATTN: E-250, Mr. D. Black	1